



Model R11LC 1500 GPM

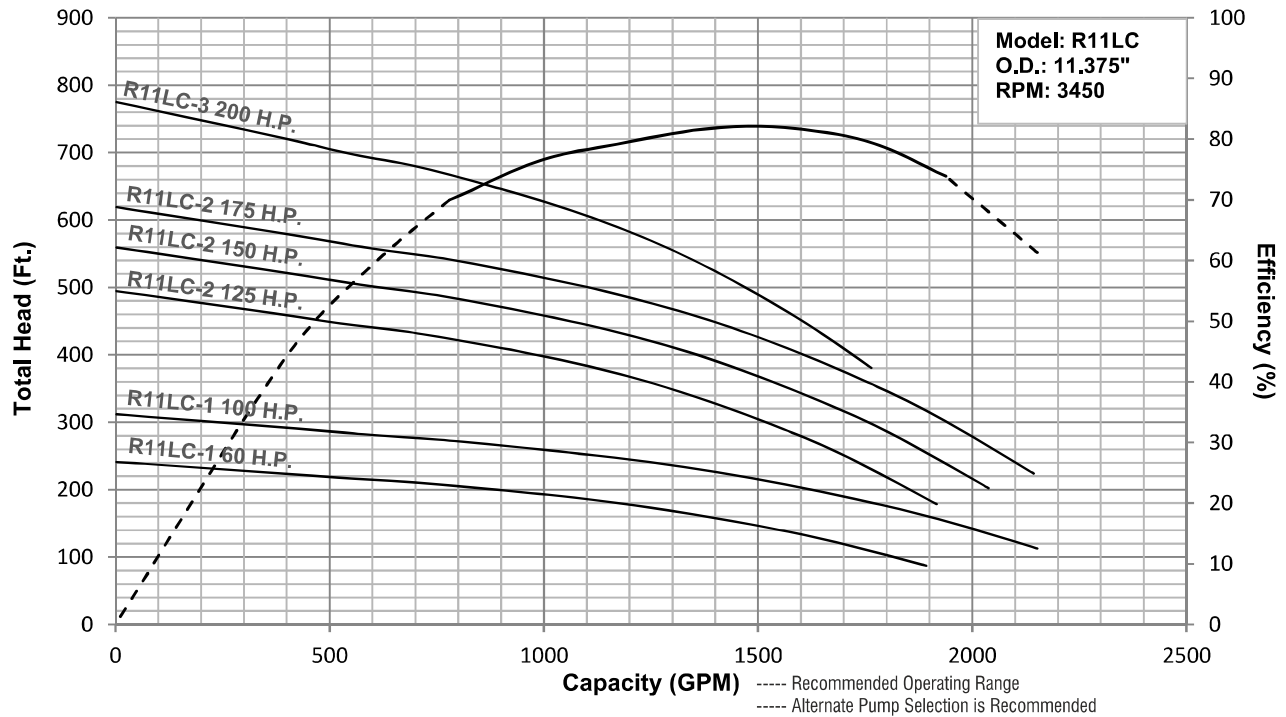

MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL
SUCTION ADAPTER	ASTM A40 CLASS 40

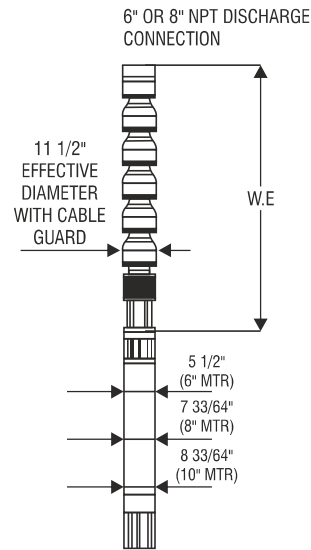

DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
60	1	R11LC01SA060687960A	30.56	246.51
100	1	R11LC01SA080610010A	43.06	358.57
125	2	R11LC02SA080688912A	43.06	358.57
150	2	R11LC02SA080694715A	43.06	358.57
175	2	R11LC02SA100699617A	43.91	368.24
200	3	R11LC03SA100691020A	53.91	463.45

NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number. (5) 175 HP is for 10" motor.