



# Model R6LC 180GPM

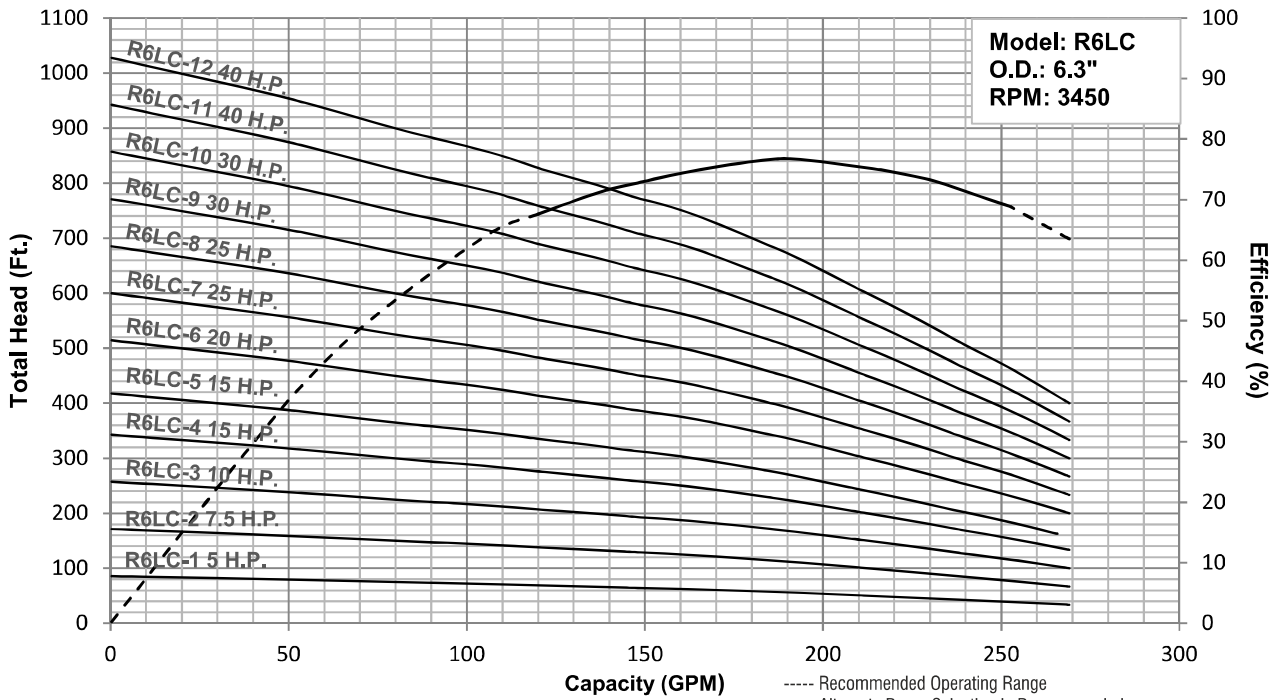

## MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SECTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

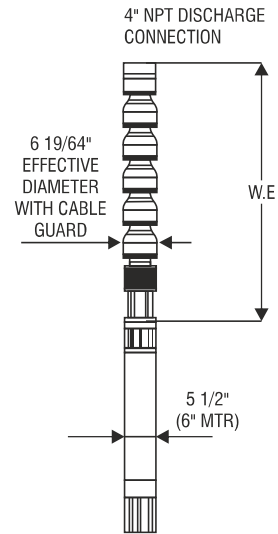


## DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
5	1	R06LC01SA060410005A	20.19	58.17
7.5	2	R06LC02SA060410075A	25.31	73.79
10	3	R06LC03SA060410010A	30.44	89.41
15	4	R06LC04SA060410015A	35.56	105.03
15	5	R06LC05SA060498715A	40.69	120.65
20	6	R06LC06SA060410020A	45.81	136.27
25	7	R06LC07SA060410025A	50.94	151.89
25	8	R06LC08SA060410025A	56.06	167.51
30	9	R06LC09SA060410030A	61.19	183.13
30	10	R06LC10SA060410030A	66.31	198.75
40	11	R06LC11SA060410040A	71.44	214.37
40	12	R06LC12SA060410040A	76.56	229.99


NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.

# Model R6HC 250GPM

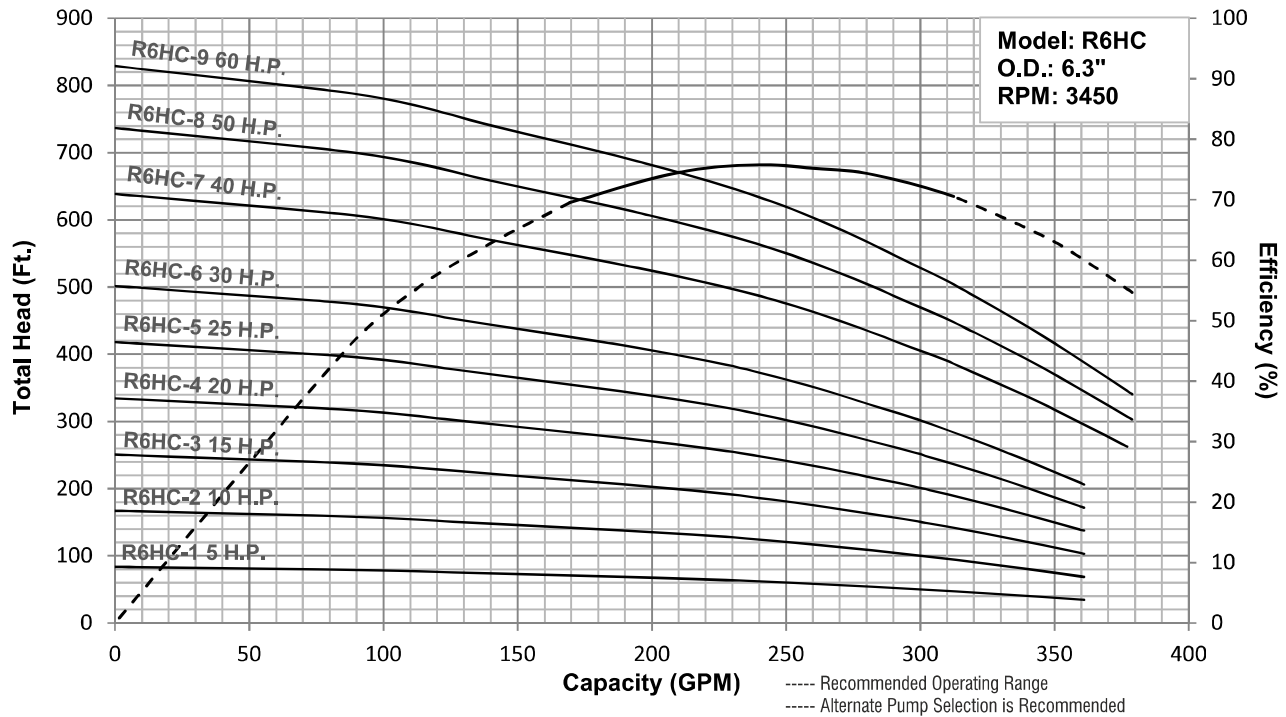

## MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

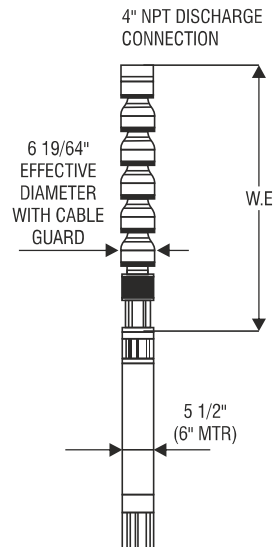

## DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
5	1	R06HC01SA060495205A	20.19	58.17
10	2	R06HC02SA060495210A	25.31	73.79
15	3	R06HC03SA060495215A	30.44	89.41
20	4	R06HC04SA060495220A	35.56	105.03
25	5	R06HC05SA060495225A	40.69	120.65
30	6	R06HC06SA060495230A	45.81	136.27
40	7	R06HC07SA060499540A	50.94	151.89
50	8	R06HC08SA060410050A	56.06	167.51
60	9	R06HC09SA060410060A	61.19	183.13

NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.