



# Model R7LC 350GPM

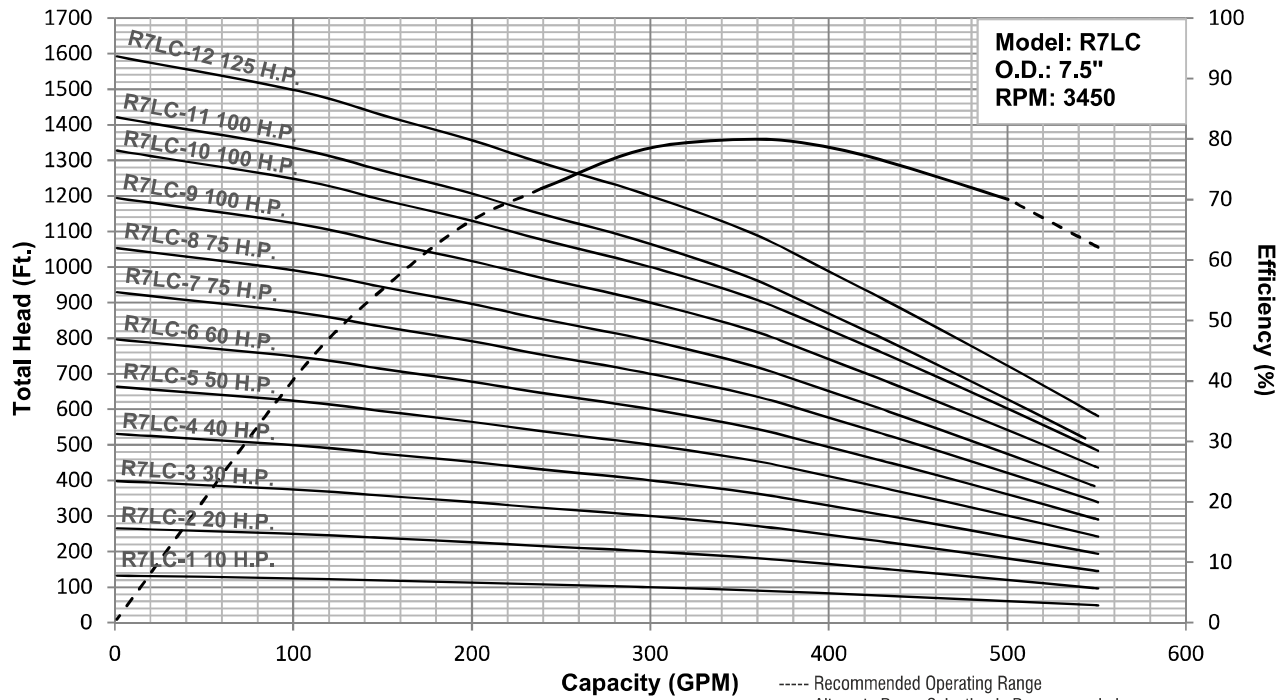

## MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

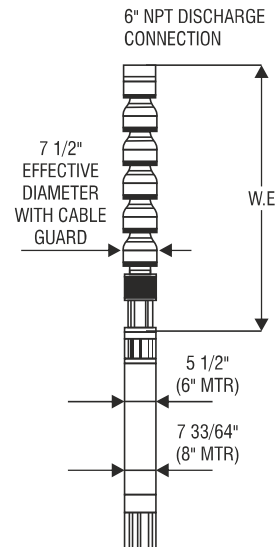


## DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
10	1	R07LC01SA060610010A	23.50	82.77
20	2	R07LC02SA060610020A	29.88	110.44
30	3	R07LC03SA060610030A	36.25	138.11
40	4	R07LC04SA060610040A	42.63	165.78
50	5	R07LC05SA060610050A	49.00	193.45
60	6	R07LC06SA060610060A	55.38	221.12
75	7	R07LC07SA080610075A	63.38	263.33
75	8	R07LC08SA080699675A	69.75	291
100	9	R07LC09SA080610010A	76.13	318.67
100	10	R07LC10SA080610010A	82.50	346.34
100	11	R07LC11SA080698610A	88.88	374.01
125	12	R07LC12SA080610012A	95.25	401.68


NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.

# Model R7HC 500GPM

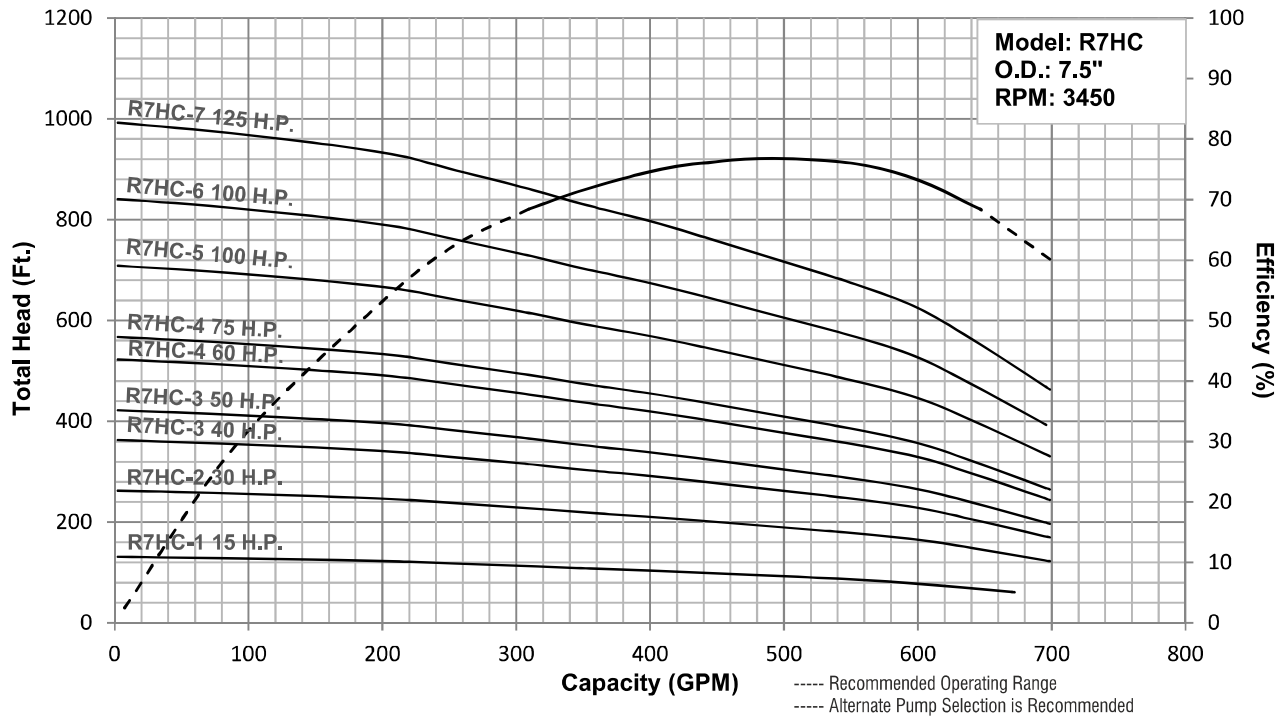

## MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

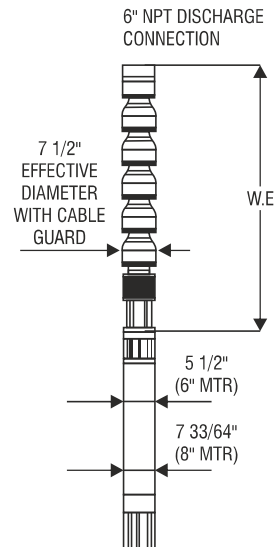

## DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
15	1	R07HC01SA060696215A	23.50	82.89
30	2	R07HC02SA060696230A	29.88	110.43
40	3	R07HC03SA060692340A	36.25	110.43
50	3	R07HC03SA060699550A	36.25	137.97
60	4	R07HC04SA060696060A	42.63	165.51
75	4	R07HC04SA080610075A	44.25	180.32
100	5	R07HC05SA080610010A	50.63	207.86
100	6	R07HC06SA080694410A	57.00	235.4
125	7	R07HC07SA080610010A	63.38	262.94

NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.