



Model J8LC 450GPM

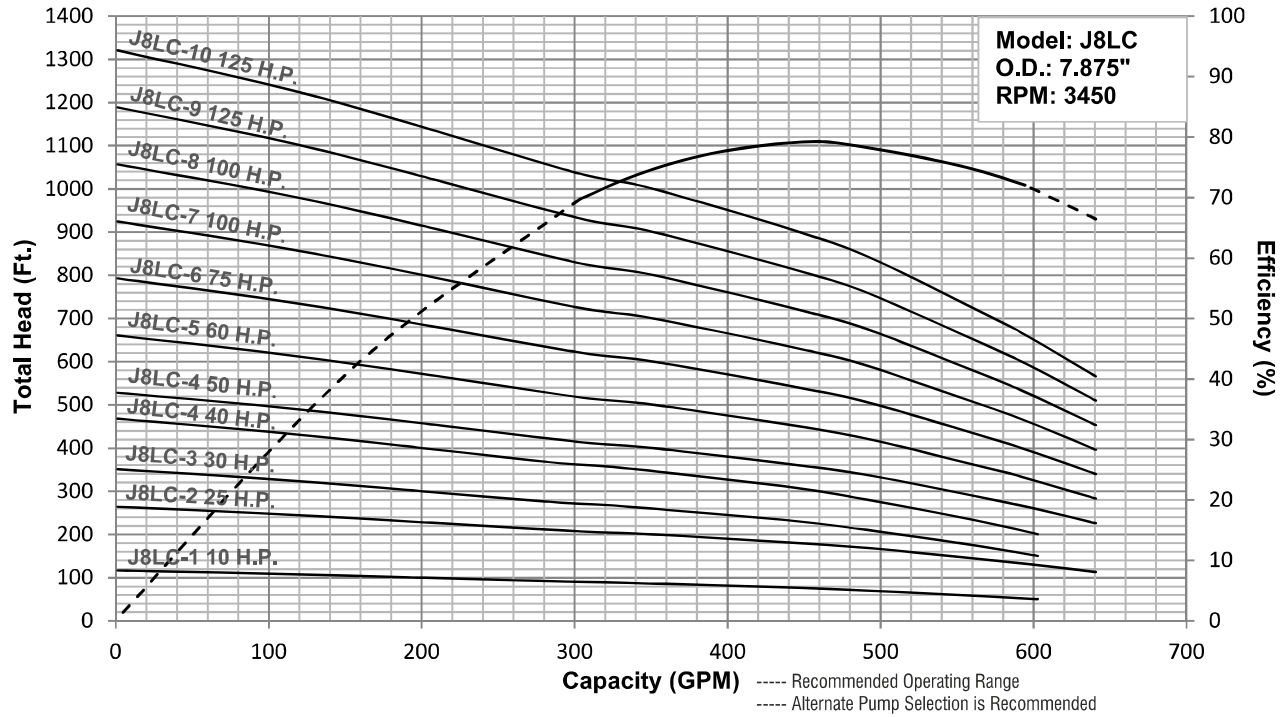

MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

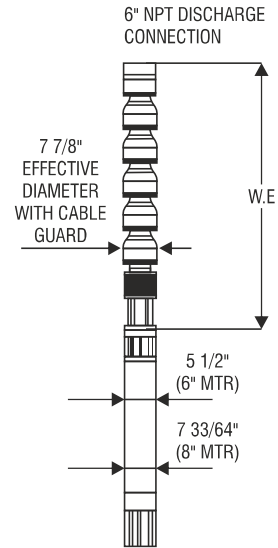


DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
10	1	J08LC01SA060694110A	23.63	86.63
25	2	J08LC02SA060610025A	30.13	117.07
30	3	J08LC03SA060694130A	36.63	147.51
40	4	J08LC04SA060694140A	43.13	177.95
50	4	J08LC04SA060610050A	43.13	177.95
60	5	J08LC05SA060610060A	49.63	208.39
75	6	J08LC06SA080610075A	57.75	253.43
100	7	J08LC07SA080610010A	64.25	283.87
100	8	J08LC08SA080610010A	70.75	314.31
125	9	J08LC09SA080610012A	77.25	344.75
125	10	J08LC10SA080610012A	83.75	375.19


NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.

Model J8HC 700GPM

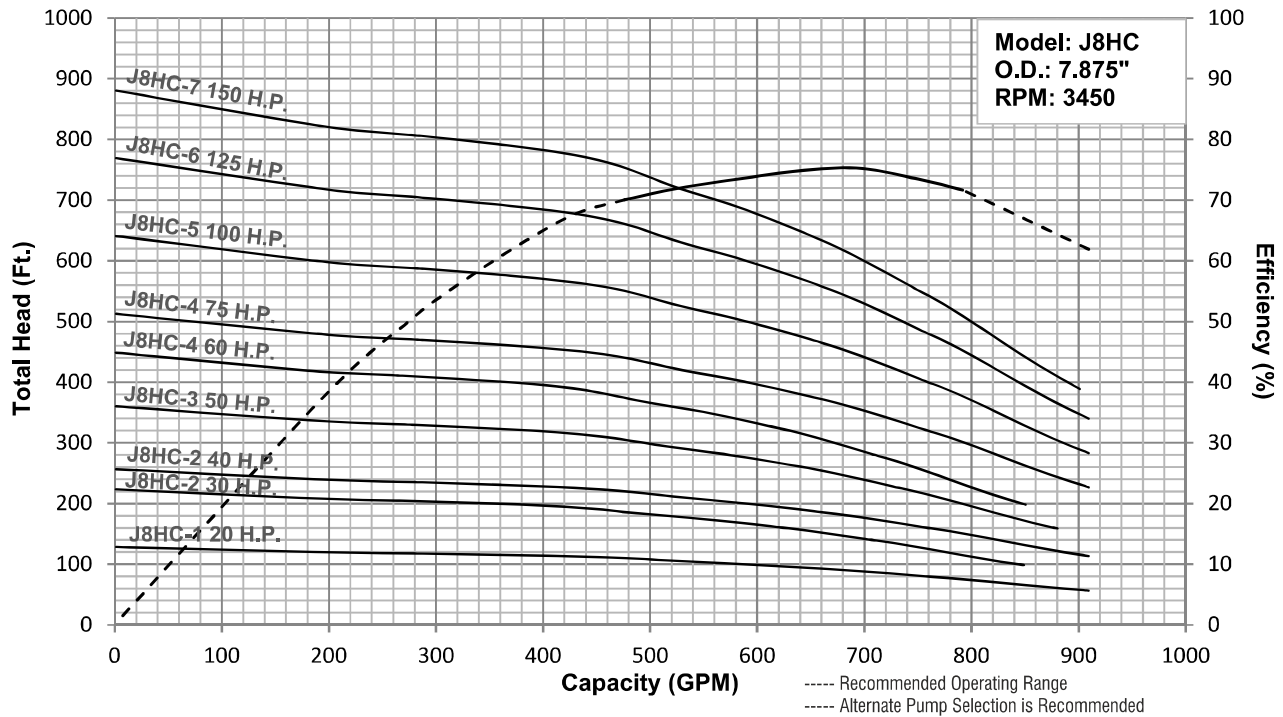

MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL

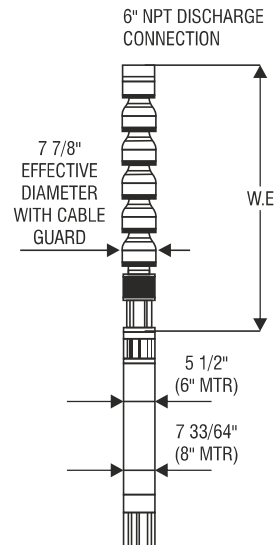

DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
20	1	J08HC01SA060610020A	23.63	86.63
30	2	J08HC02SA060693330A	30.13	117.07
40	2	J08HC02SA060610040A	30.13	117.07
50	3	J08HC03SA060696750A	36.63	147.51
60	4	J08HC04SA060693560A	36.63	147.51
75	4	J08HC04SA080610075A	44.75	192.55
100	5	J08HC05SA080610010A	51.25	222.99
125	6	J08HC06SA080610012A	57.75	253.43
150	7	J08HC07SA080699015A	64.25	283.87

NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number.