



Model R9LC 800GPM

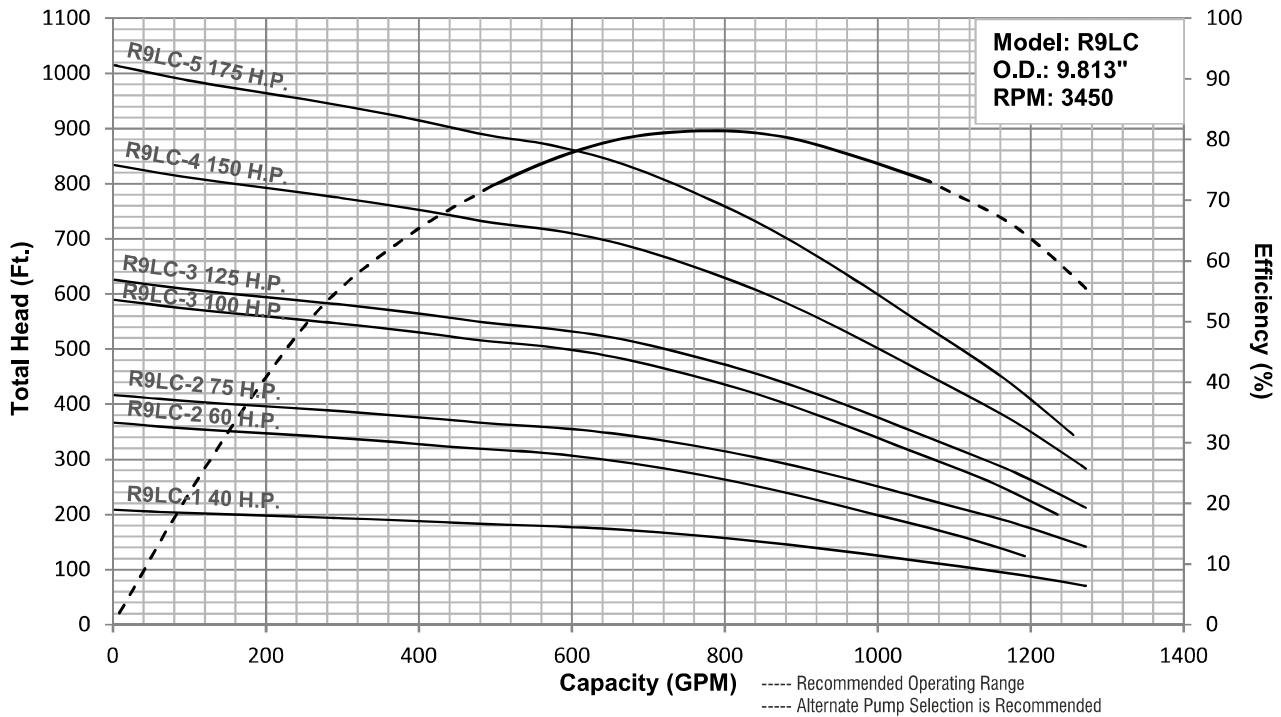

MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL
SUCTION ADAPTER	ASTM A40 CLASS 40

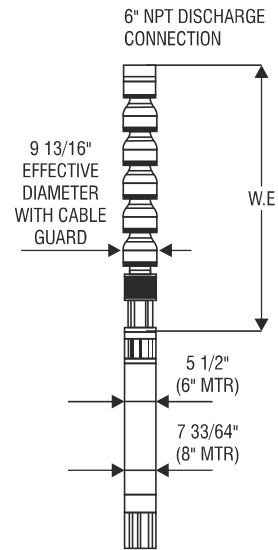


DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
40	1	R09LC01SA060610040A	28.56	187.56
60	2	R09LC02SA060693760A	37.06	247.56
75	2	R09LC02SA080610075A	39.56	264.22
100	3	R09LC03SA080697010A	48.06	324.22
125	3	R09LC03SA080610012A	48.06	324.22
150	4	R09LC04SA080610015A	56.56	384.22
175	5	R09LC05SA100698717A	65.91	453.86


NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number. (5) 175 HP is for 10" motor.

Model R9HC 1100 GPM

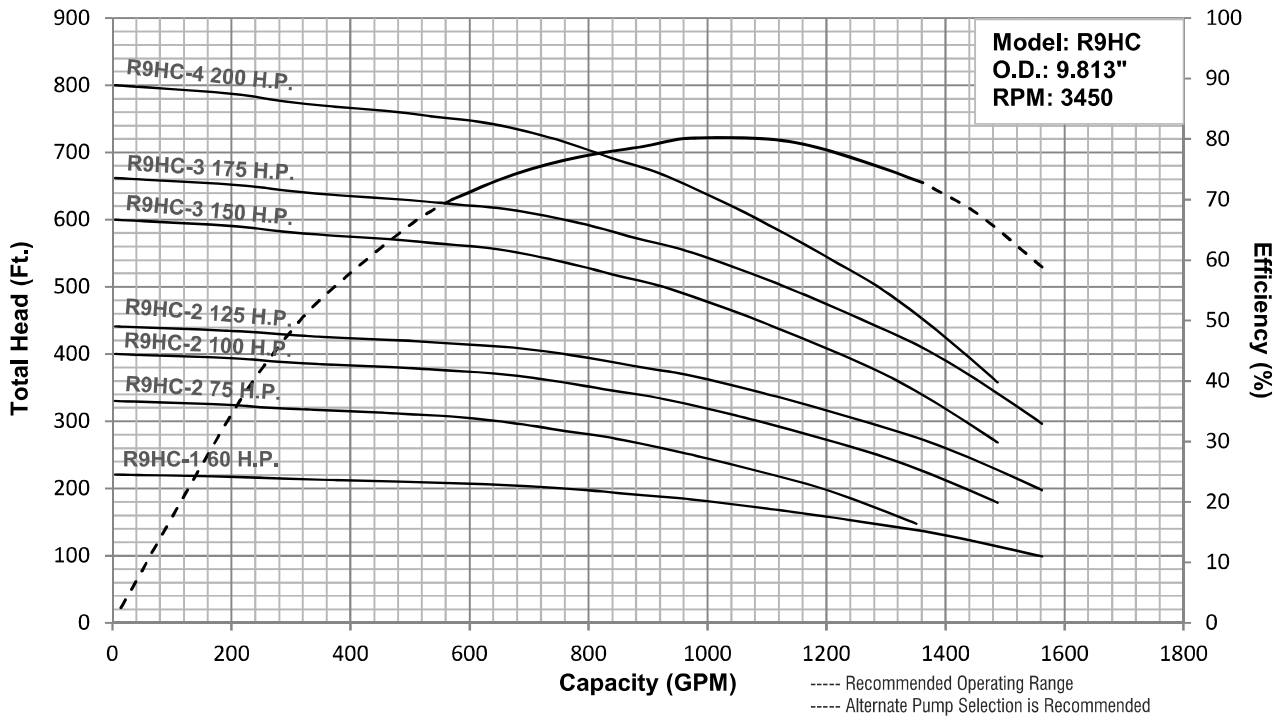

MATERIALS OF CONSTRUCTION

NAME	MATERIAL
SUCTION	ASTM A40 CLASS 40
IMPELLER	CDA836 Pb RED BRASS
SUCTION BEARING	C-844 BRONZE
SAND COLLAR	416 STAINLESS STEEL
IMPELLER COLLET	416 STAINLESS STEEL
INT BOWL	ASTM A40 CLASS 40
INT. BOWL BEARING	C-844 BRONZE
INT. BOWL BEARING	RUBBER
DISCHARGE BOWL	ASTM A40 CLASS 40
DISCHARGE BOWL BEARING	C-844 BRONZE
BOTTOM PLUG	ASTM A40 CLASS 40
BOWL SHAFT	416 STAINLESS STEEL
UPTHRUST COLLAR	416 STAINLESS STEEL
FASTENERS	SAE J429 Gr 8
CABLE GUARD	ASTM A240 S30400
SUCTION STRAINER	ASTM A240 S30400
SHAFT COUPLING	416 STAINLESS STEEL
SUCTION ADAPTER	ASTM A40 CLASS 40

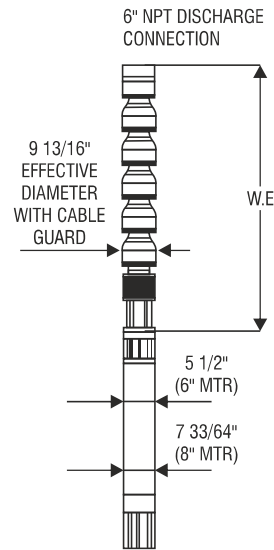

DIMENSION AND WEIGHTS

HP	STAGES	W.E. ORDER NUMBER	W.E. LENGTH	W.E. WT. (LBS.)
60	1	R09HC01SA060610060A	28.56	187.56
75	2	R09HC02SA080686975A	39.56	264.22
100	2	R09HC02SA080693710A	39.56	264.22
125	2	R09HC02SA080610012A	39.56	264.22
150	3	R09HC03SA080697115A	48.06	324.22
175	3	R09HC03SA100610017A	48.91	333.85
200	4	R09HC04SA100610020A	57.41	393.85

NOTES: (1) All dimensions in inches and weights in Lbs. (2) Solid line is recommended operating range. (3) For intermediate horsepower pumps consult factory. (4) Please specify all options changes in W.E. order number. (5) 175 HP & 200 HP are 10" motor.