




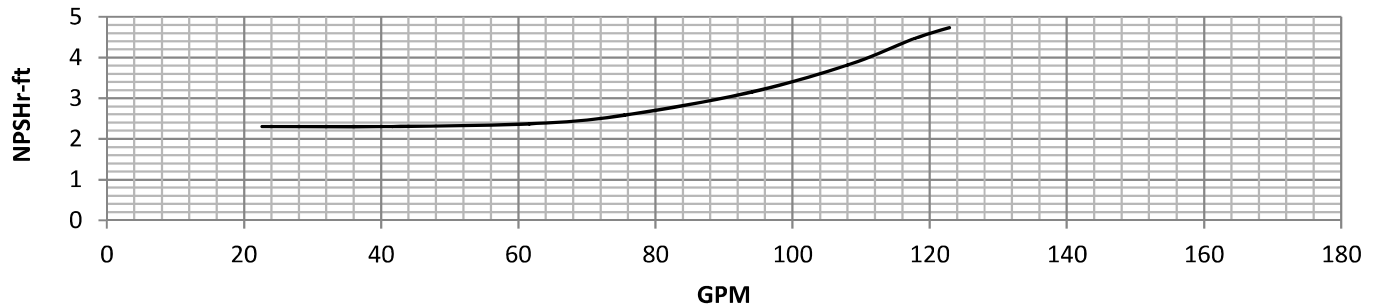

SUBMERSIBLES AND ELECTRIC

Model:	R6LC	Disch sizes:	4"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1501154002	Shaft Dia:	1.000"	1 Stage	-3	
Rev.:	JAN/15/15	Bowl Lateral:	0.418"	2 Stage	-2	
Imp. Type:	Closed	Bowl O.D.:	5.900"	3 Stage	-0.5	
Imp. Diam.:	4.220"	K-Factor:	2.10 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2100			
Stage Qty.:	1	Max P.S.I.:	420			

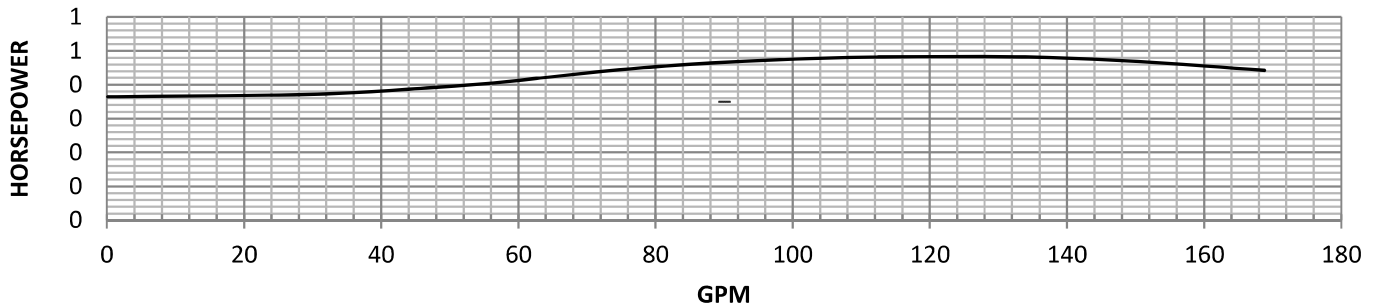

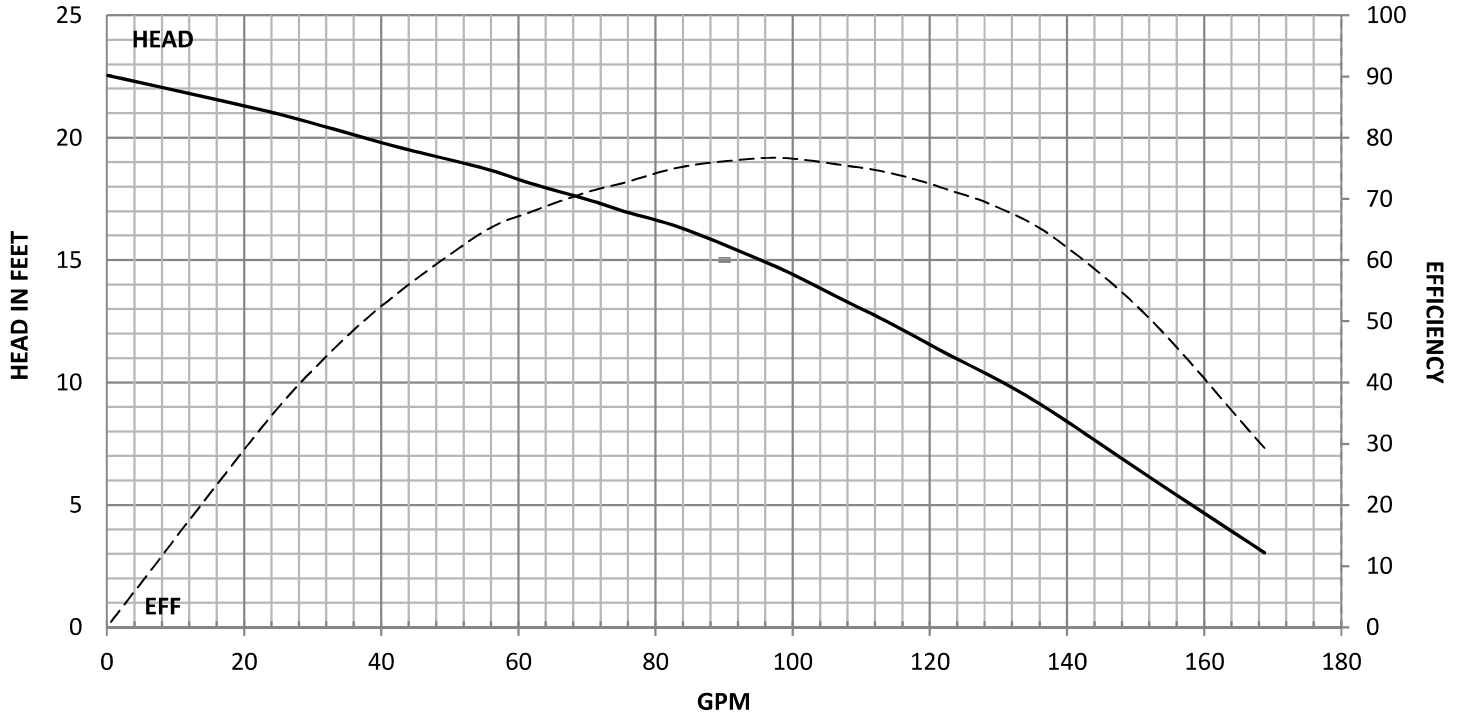

SUBMERSIBLES AND ELECTRIC

Model:	R6HC	Disch sizes:	4"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0811143872	Shaft Dia:	1.000"	1 Stage	-3	
Rev.:	NOV/08/14	Bowl Lateral:	0.418"	2 Stage	-2	
Imp. Type:	Closed	Bowl O.D.:	5.900"	3 Stage	-0.5	
Imp. Diam.:	4.220"	K-Factor:	2.10 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2160			
Stage Qty.:	1	Max P.S.I.:	420			

