




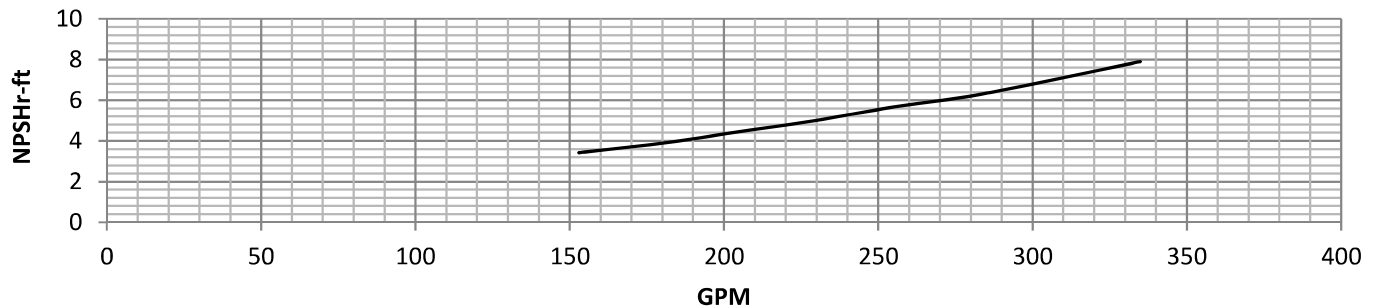

SUBMERSIBLES AND ELECTRIC




Model:	J8LO	Disch sizes:	4" & 6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1301154000	Shaft Dia:	1.188"	1 Stage	-2	
Rev.:	OCT/28/15	Bowl Lateral:	0.688"	2 Stage	-1	
Imp. Type:	Open	Bowl O.D.:	7.500"	3 Stage	0	
Imp. Diam.:	5.250"	K-Factor:	5.30 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2625	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	425			

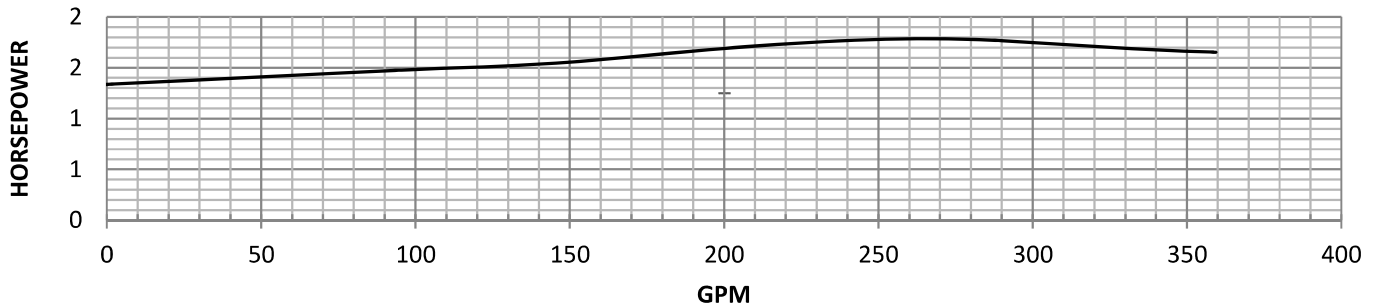

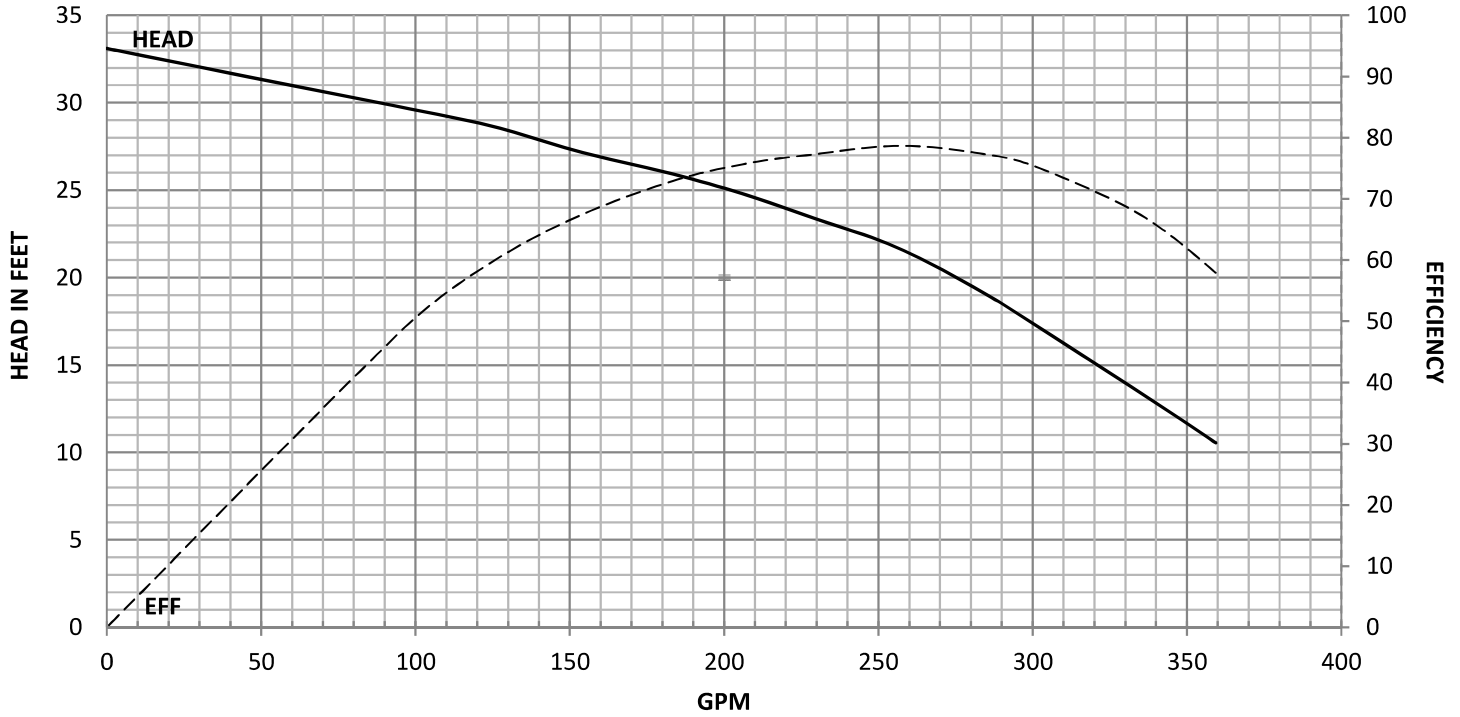

SUBMERSIBLES AND ELECTRIC




Model:	J8LC	Disch sizes:	4" & 6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1501154003	Shaft Dia:	1.188"	1 Stage	-2	
Rev.:	JAN/15/15	Bowl Lateral:	0.600"	2 Stage	-1	
Imp. Type:	Closed	Bowl O.D.:	7.500"	3 Stage	0	
Imp. Diam.:	5.250"	K-Factor:	4.00 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2660			
Stage Qty.:	1	Max P.S.I.:	425			

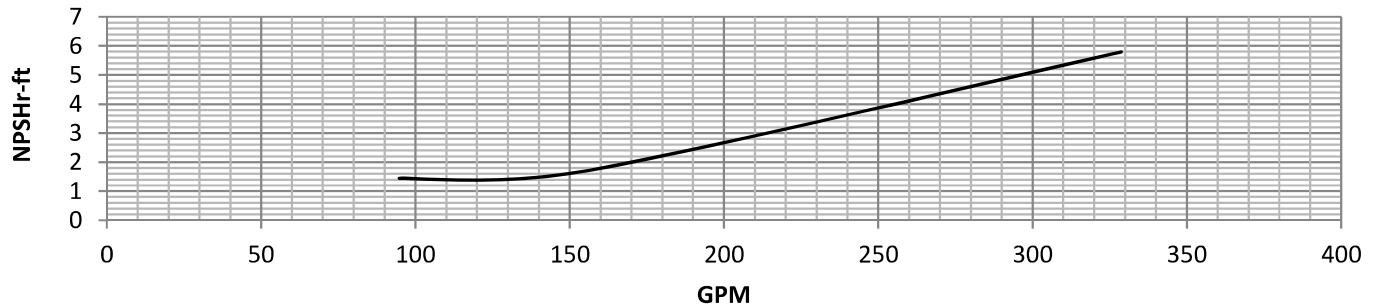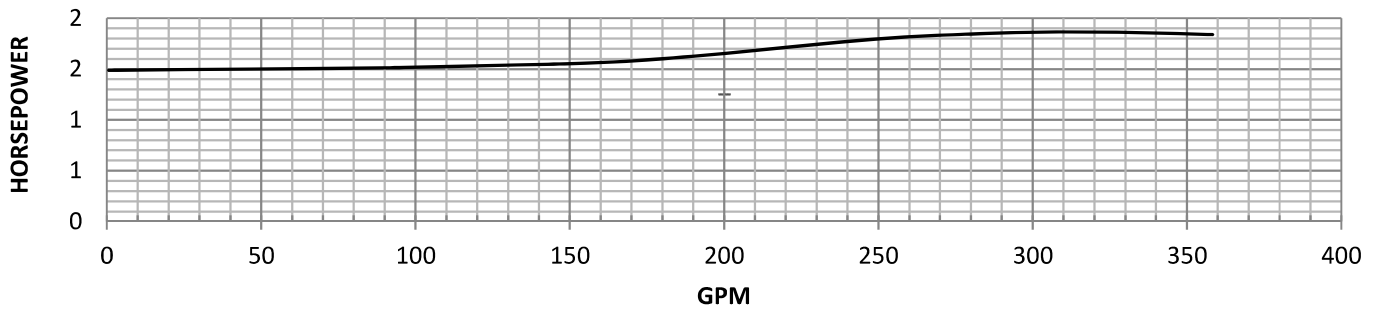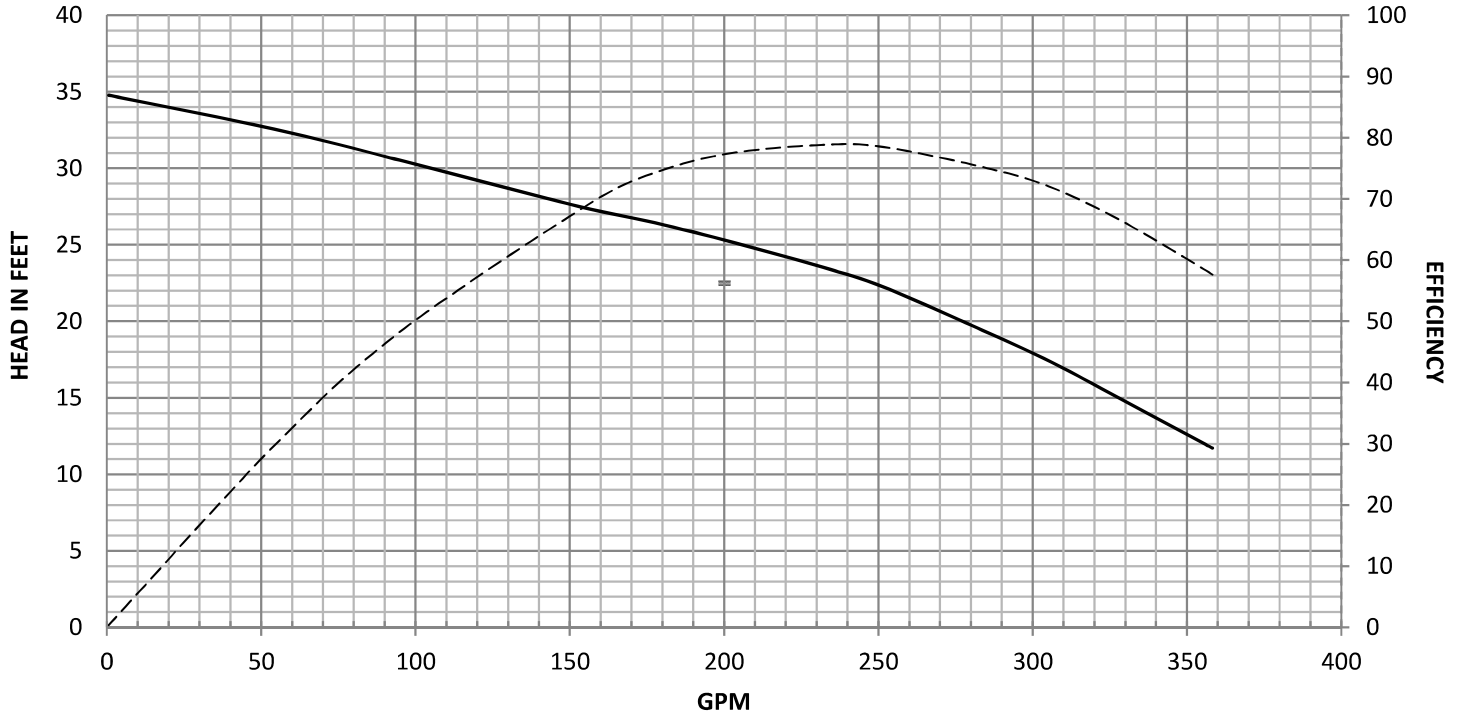



SUBMERSIBLES AND ELECTRIC




Model:	J8HO	Disch sizes:	4" & 6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1301153999	Shaft Dia:	1.188"	1 Stage	-2	
Rev.:	JAN/13/15	Bowl Lateral:	0.688"	2 Stage	-1	
Imp. Type:	Open	Bowl O.D.:	7.500"	3 Stage	0	
Imp. Diam.:	5.250"	K-Factor:	5.30 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	1760	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	425			

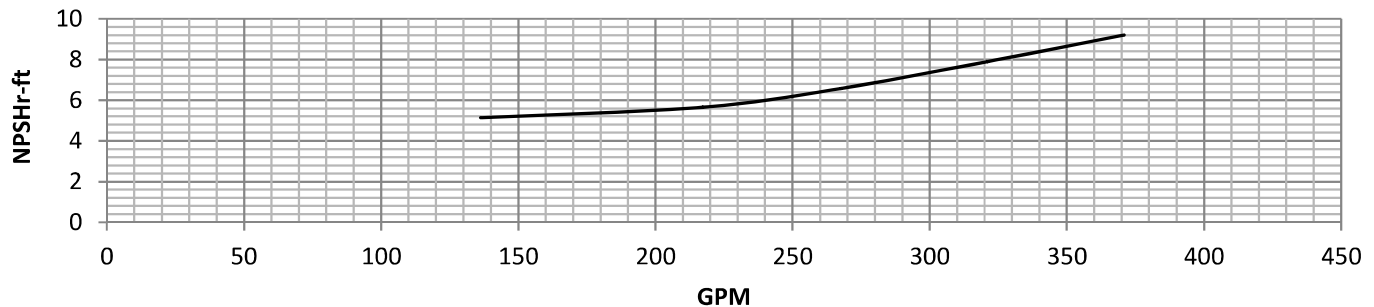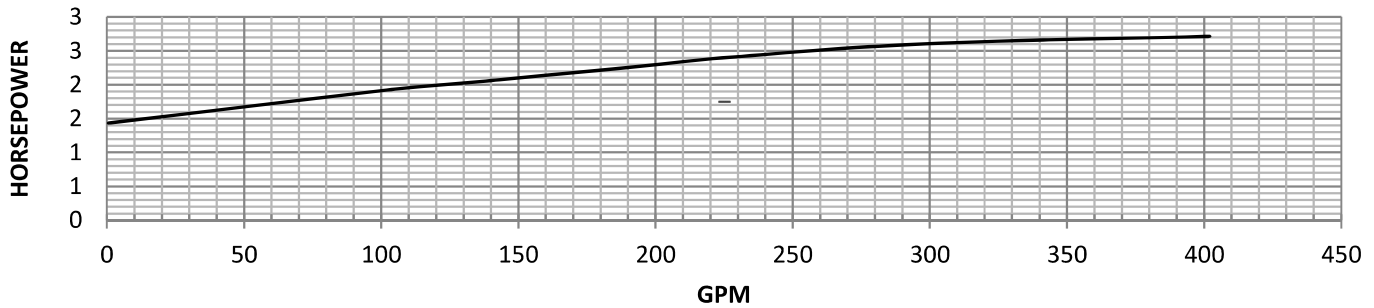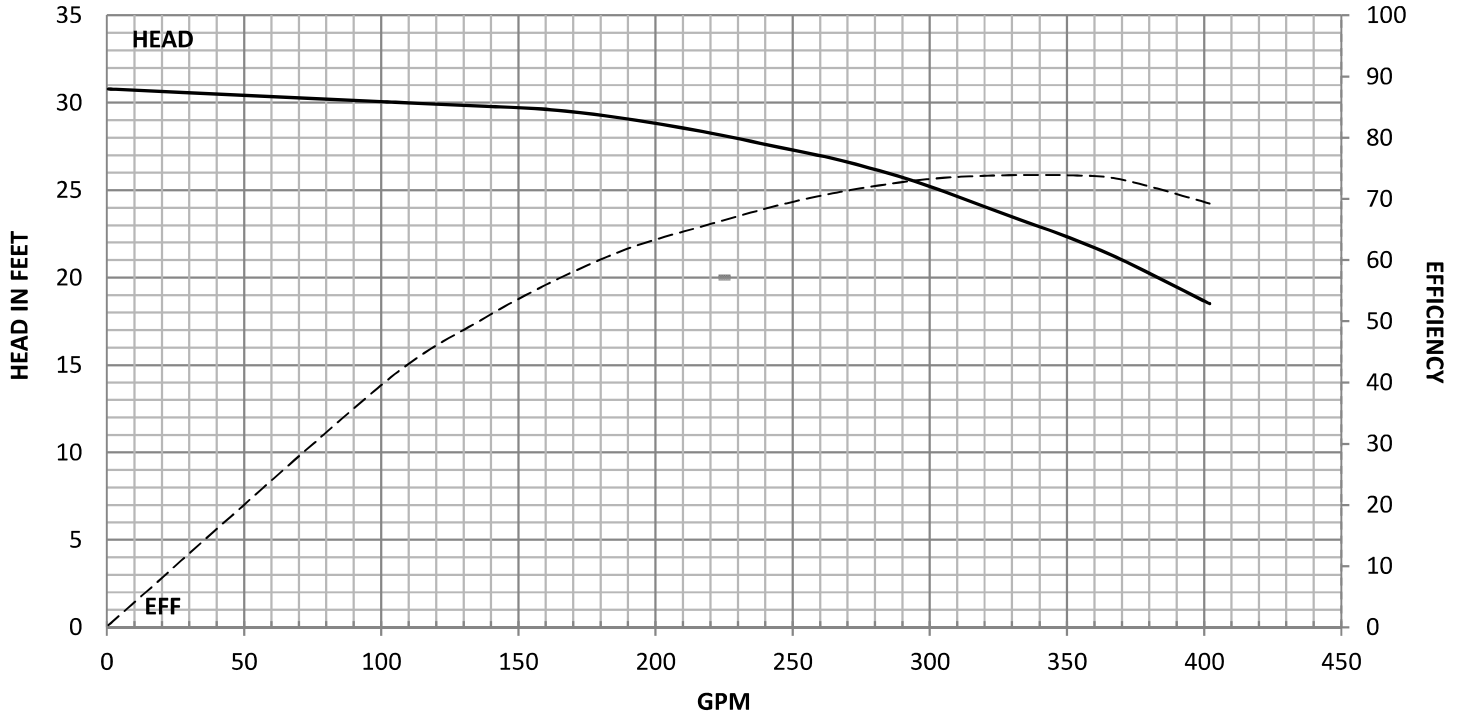



SUBMERSIBLES AND ELECTRIC




Model:	J8HC	Disch sizes:	4" & 6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0312143928	Shaft Dia:	1.188"	1 Stage	-2	
Rev.:	DEC/03/14	Bowl Lateral:	0.600"	2 Stage	-1	
Imp. Type:	Closed	Bowl O.D.:	7.500"	3 Stage	0	
Imp. Diam.:	5.250"	K-Factor:	4.00 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2765			
Stage Qty.:	1	Max P.S.I.:	425			

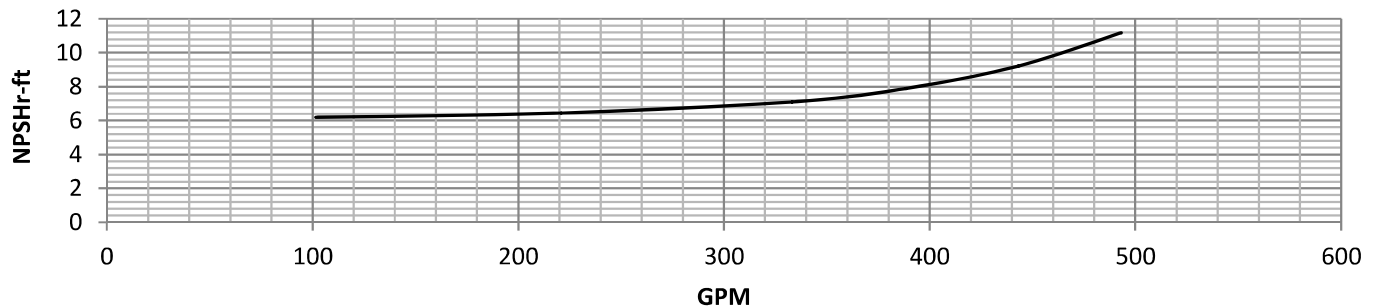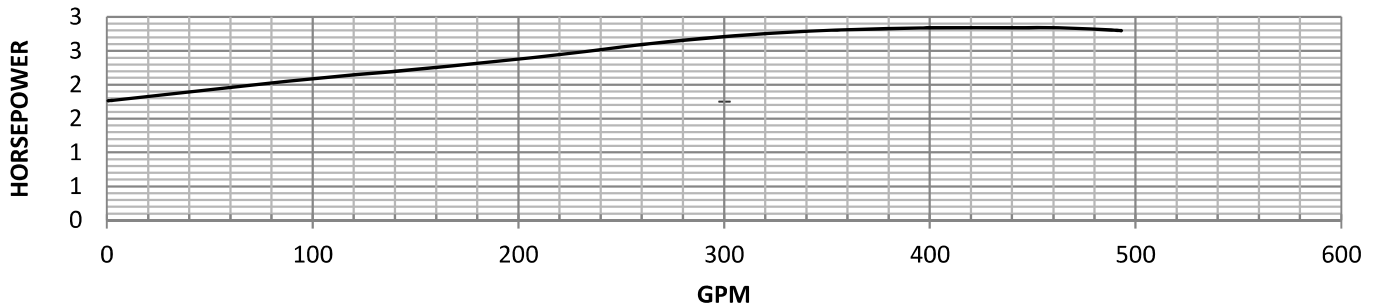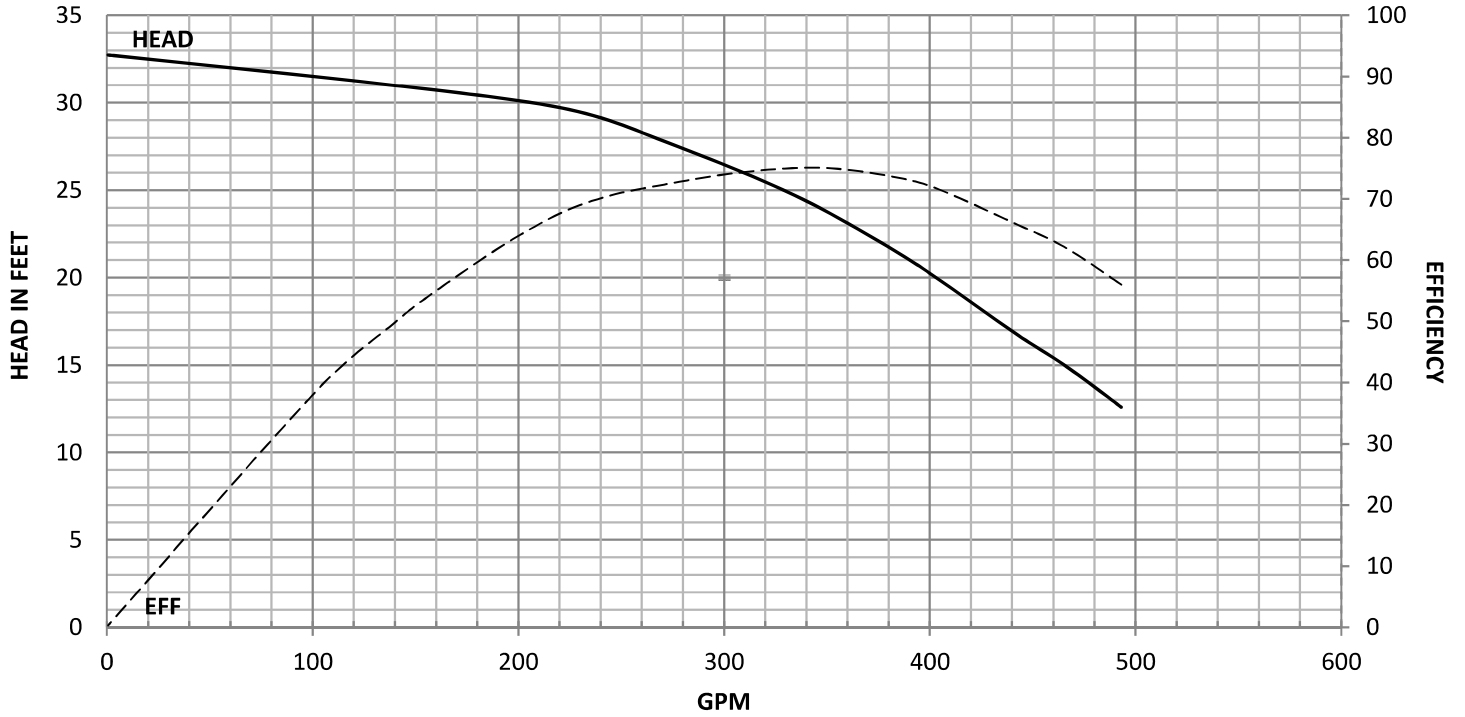



SUBMERSIBLES AND ELECTRIC




Model:	F8LO	Disch sizes:	6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0707165201	Shaft Dia:	1.188"	1 Stage	-3	
Rev.:	JUL/07/16	Bowl Lateral:	0.910"	2 Stage	-1.5	
Imp. Type:	Open	Bowl O.D.:	7.500"	3 Stage	-1	
Imp. Diam.:	5.060"	K-Factor:	9.90 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	3750	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	400			

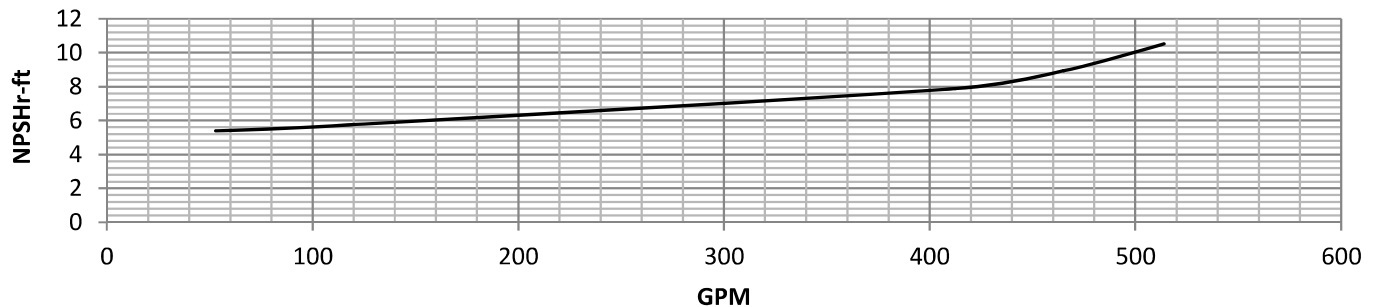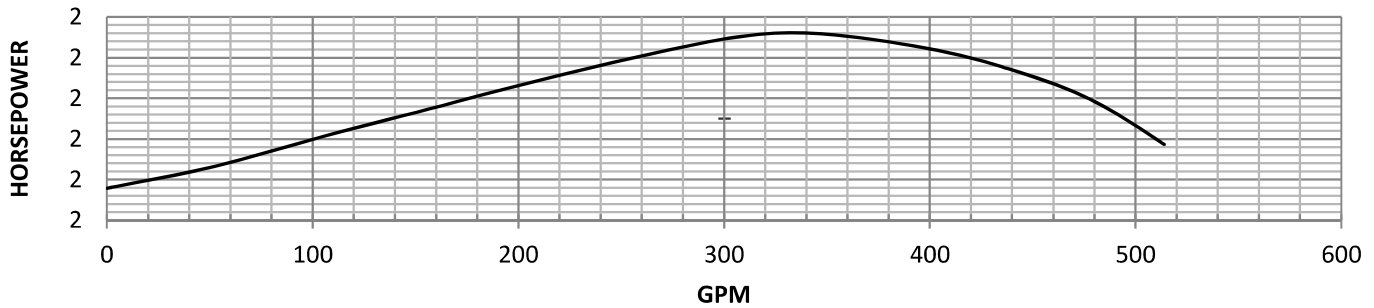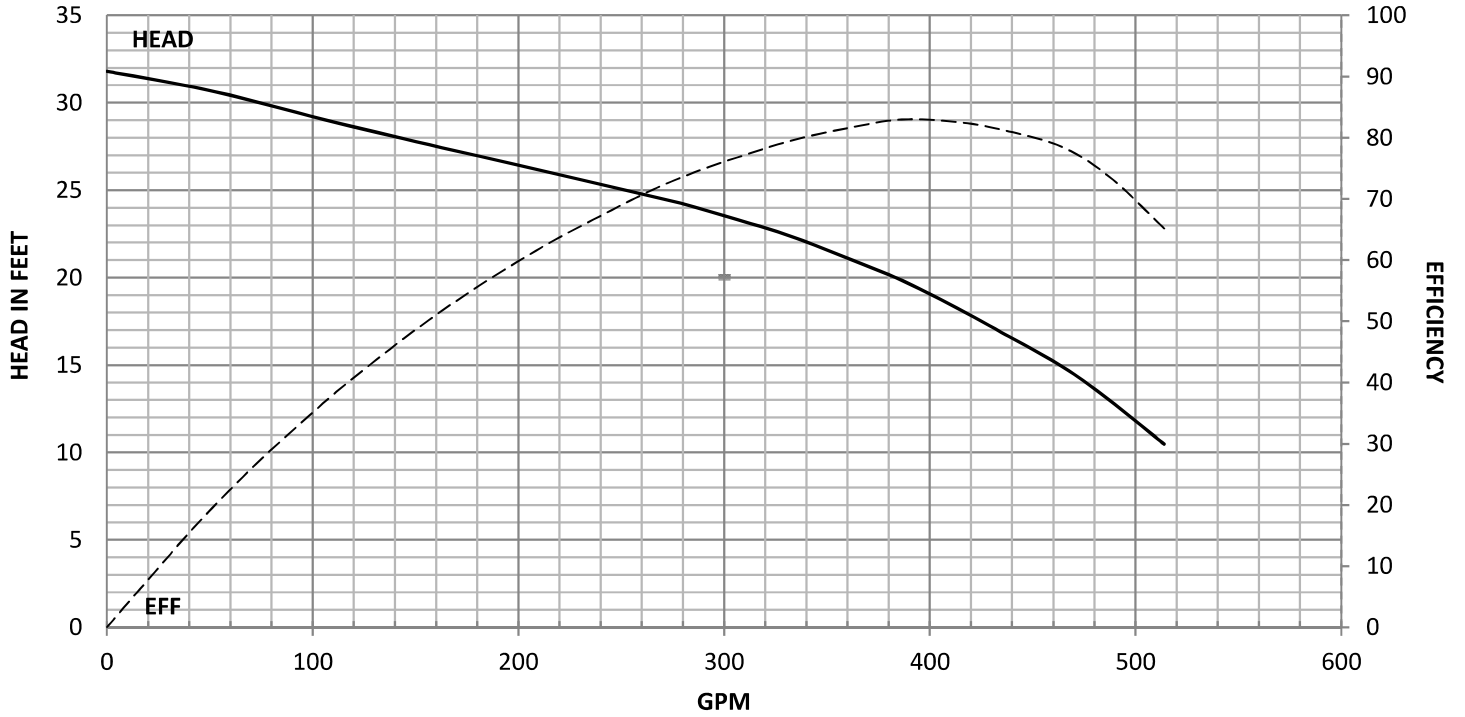



SUBMERSIBLES AND ELECTRIC




Model:	F8LC	Disch sizes:	6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0107165188	Shaft Dia:	1.188"	1 Stage	-3	
Rev.:	JUL/01/16	Bowl Lateral:	0.863"	2 Stage	-1.5	
Imp. Type:	Closed	Bowl O.D.:	7.500"	3 Stage	-1	
Imp. Diam.:	5.060"	K-Factor:	7.90 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	3750			
Stage Qty.:	1	Max P.S.I.:	400			

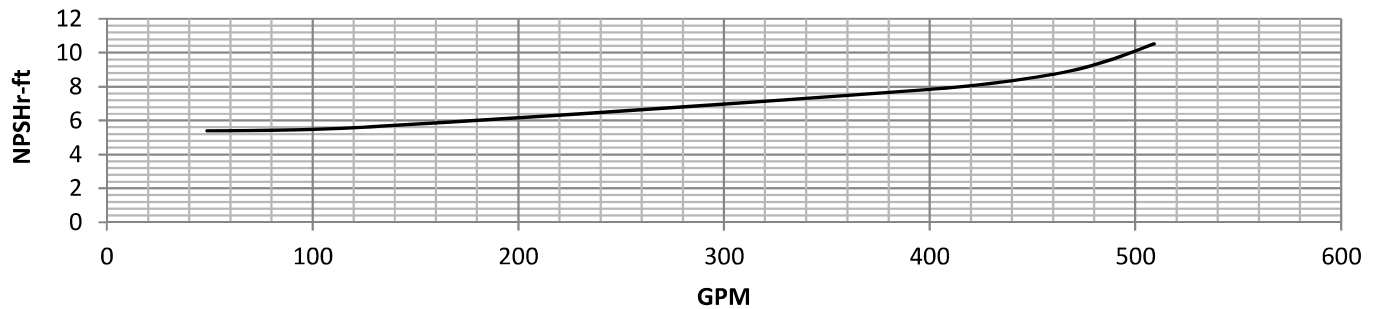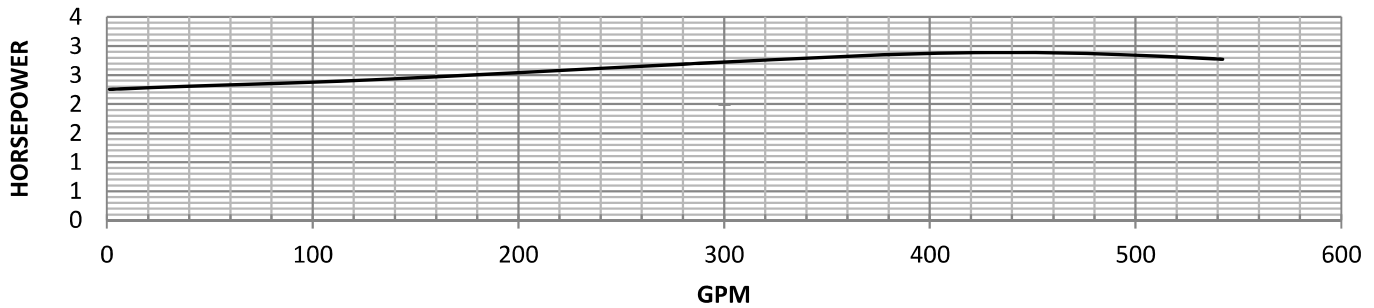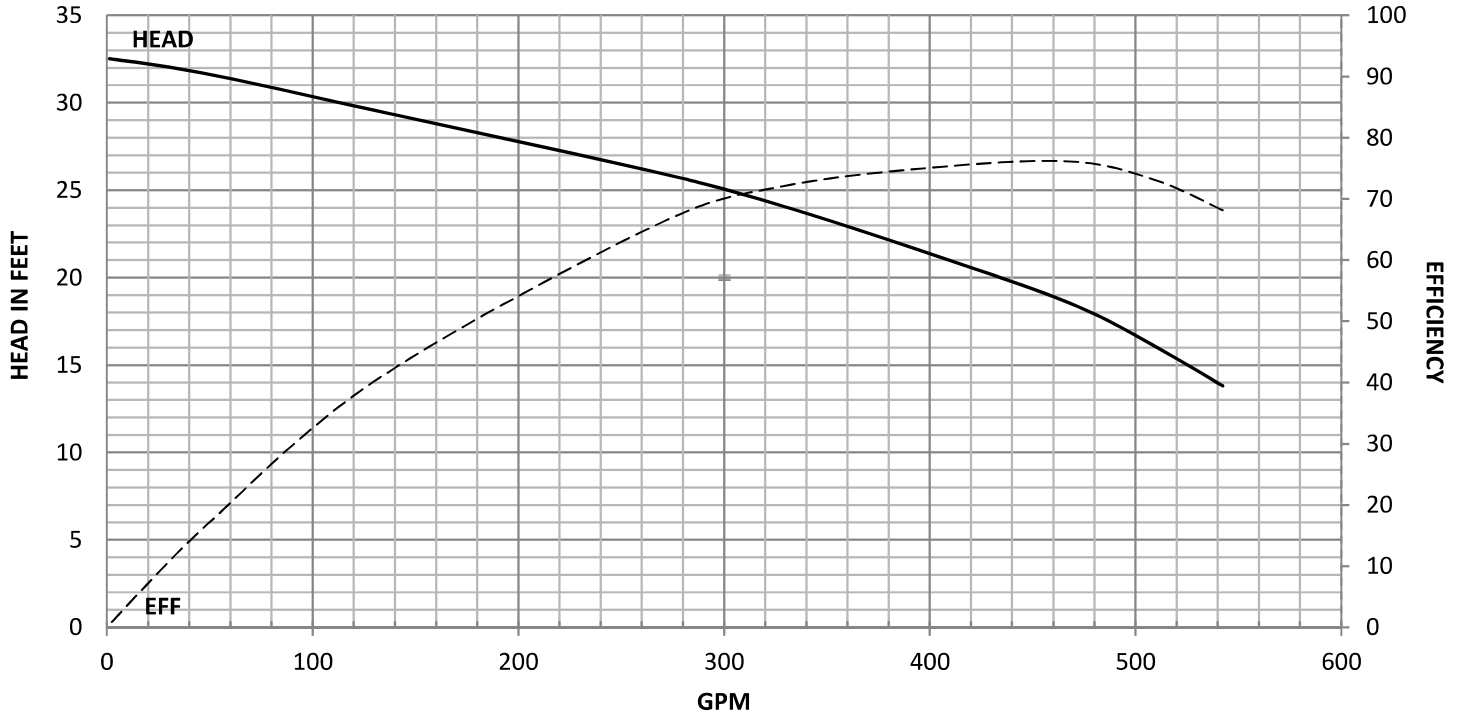



SUBMERSIBLES AND ELECTRIC

Model:	F8MO	Disch sizes:	6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0707165198	Shaft Dia:	1.188"	1 Stage	-3	
Rev.:	JUL/07/16	Bowl Lateral:	0.910"	2 Stage	-1.5	
Imp. Type:	Open	Bowl O.D.:	7.500"	3 Stage	-1	
Imp. Diam.:	5.060"	K-Factor:	9.90 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	3850	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	400			

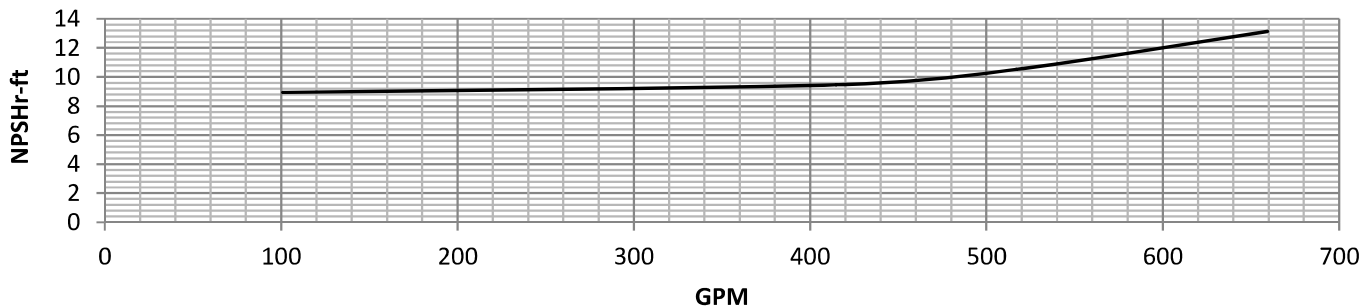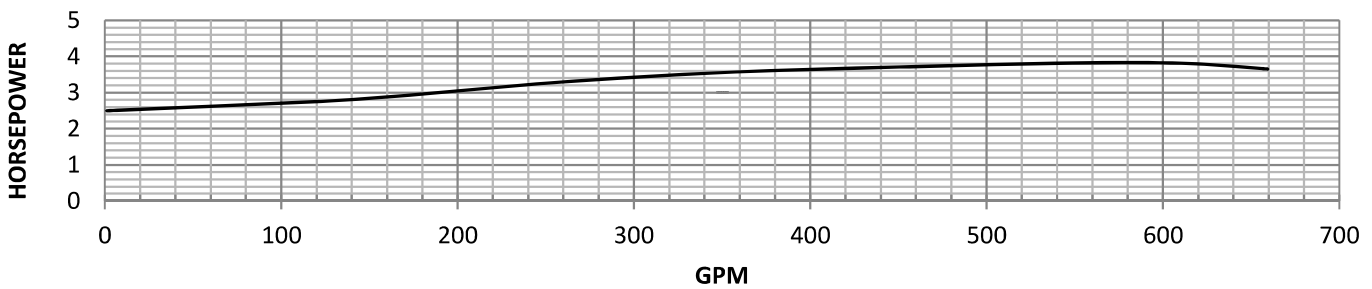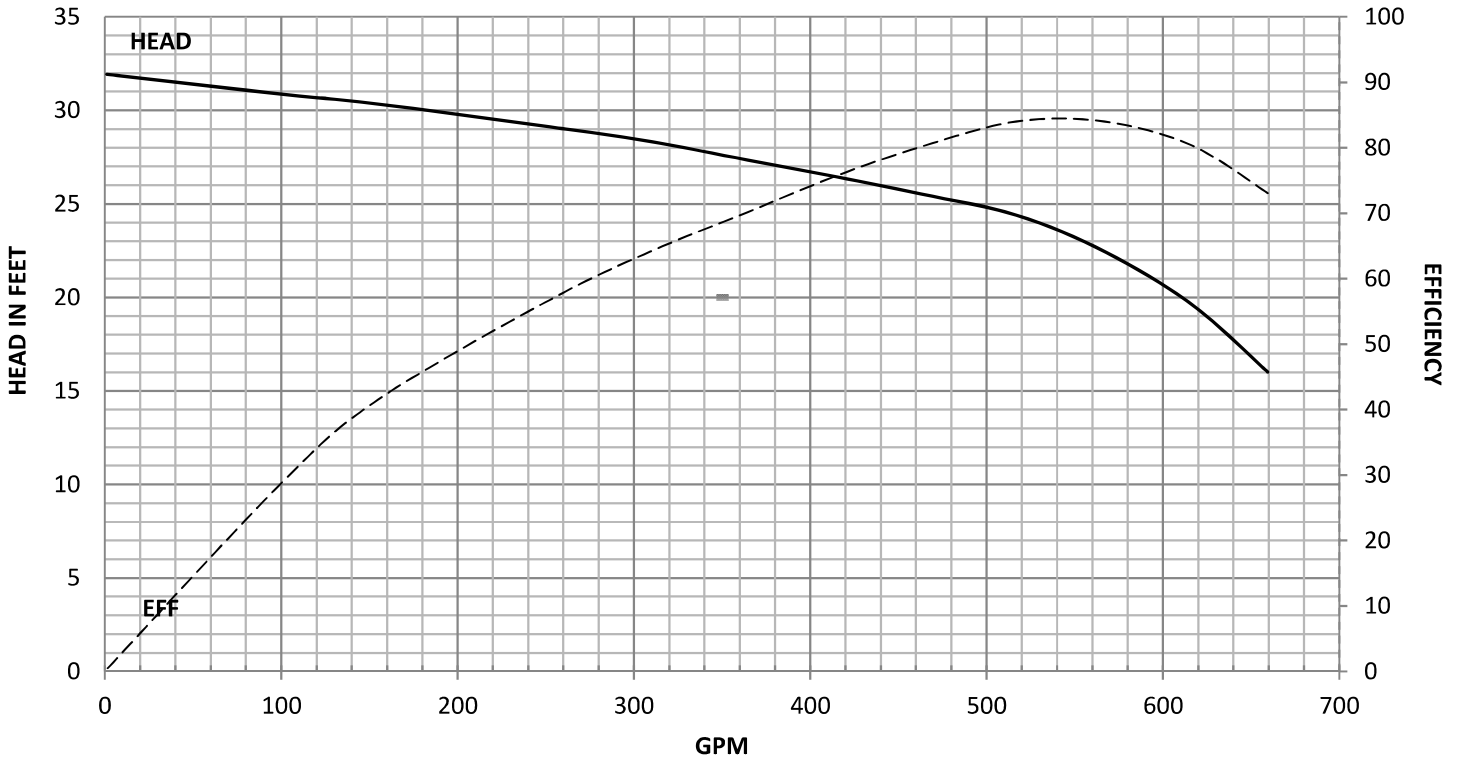



SUBMERSIBLES AND ELECTRIC

Model:	F8MC	Disch sizes:	6"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	2706165171	Shaft Dia:	1.188"	1 Stage	-4	
Rev.:	JUN/27/16	Bowl Lateral:	0.863"	2 Stage	-2	
Imp. Type:	Closed	Bowl O.D.:	7.500"	3 Stage	-1	
Imp. Diam.:	5.060"	K-Factor:	7.90 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	3850			
Stage Qty.:	1	Max P.S.I.:	400			

