




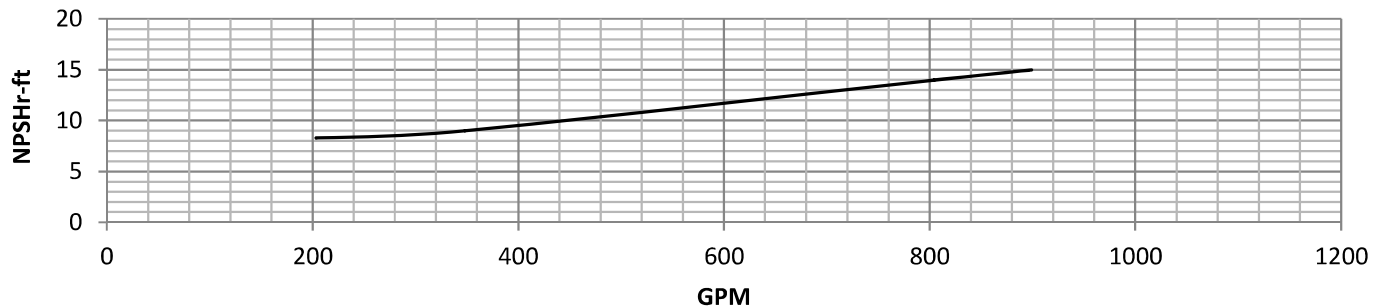

SUBMERSIBLES AND ELECTRIC




Model:	J9HO	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1311176233	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	NOV/13/17	Bowl Lateral:	1.000"	2 Stage	-1	
Imp. Type:	Open	Bowl O.D.:	8.875"	3 Stage	-0.5	
Imp. Diam.:	6.370"	K-Factor:	—	4 Stage	0.0	
RPM:	1770	Ns:	—	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	370			

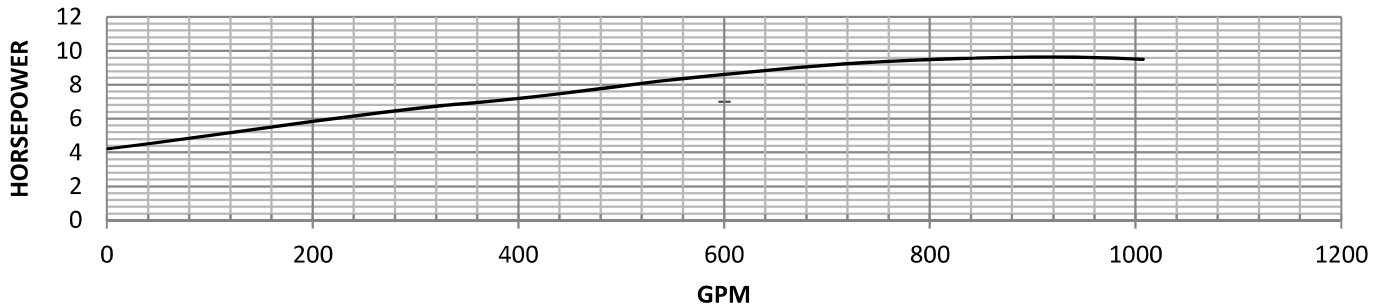

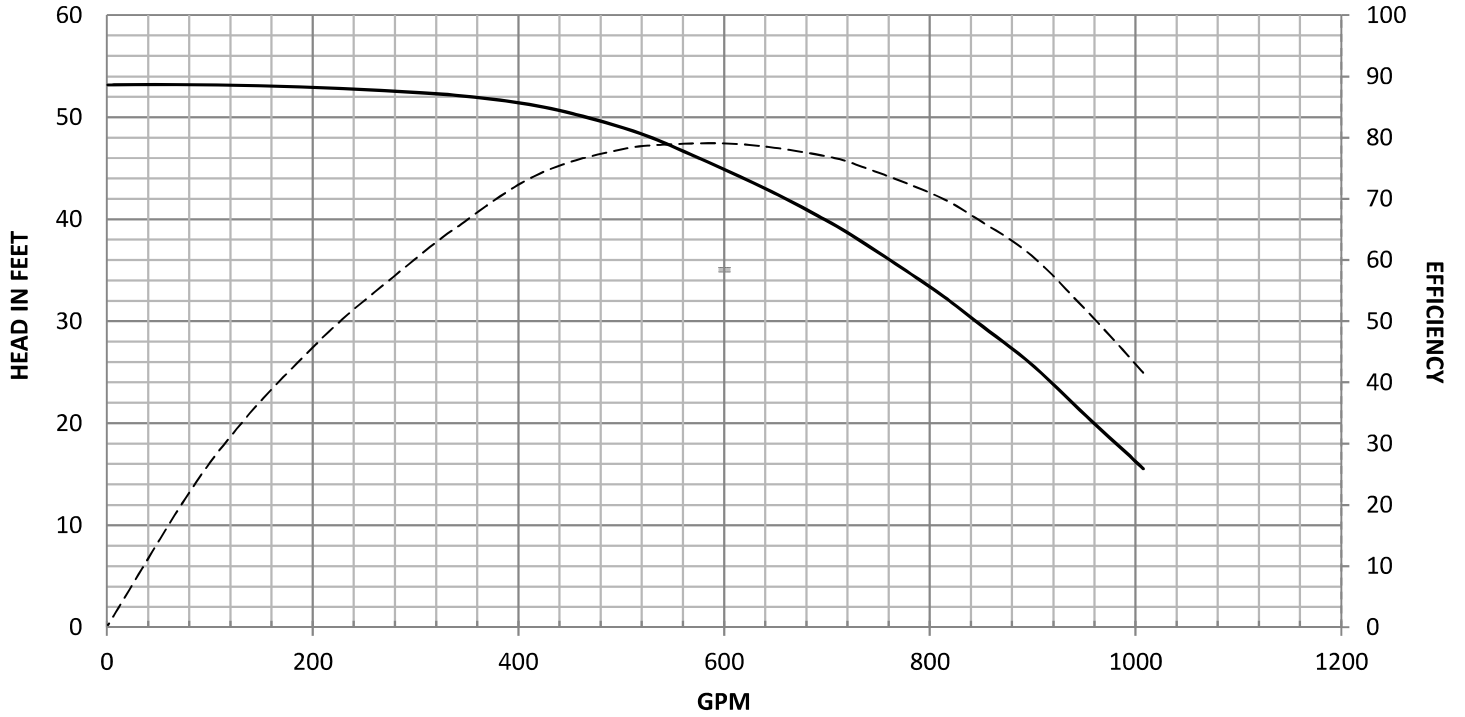

SUBMERSIBLES AND ELECTRIC




Model:	J9HC	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	2209176105	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	NOV/22/17	Bowl Lateral:	1.000"	2 Stage	-1	
Imp. Type:	Closed	Bowl O.D.:	8.875"	3 Stage	-0.5	
Imp. Diam.:	6.310"	K-Factor:	—	4 Stage	0.0	
RPM:	1770	Ns:	—			
Stage Qty.:	1	Max P.S.I.:	-			

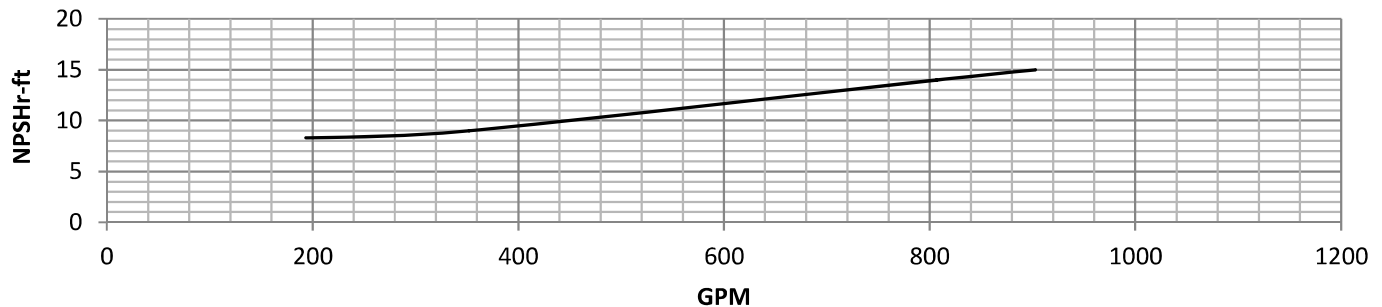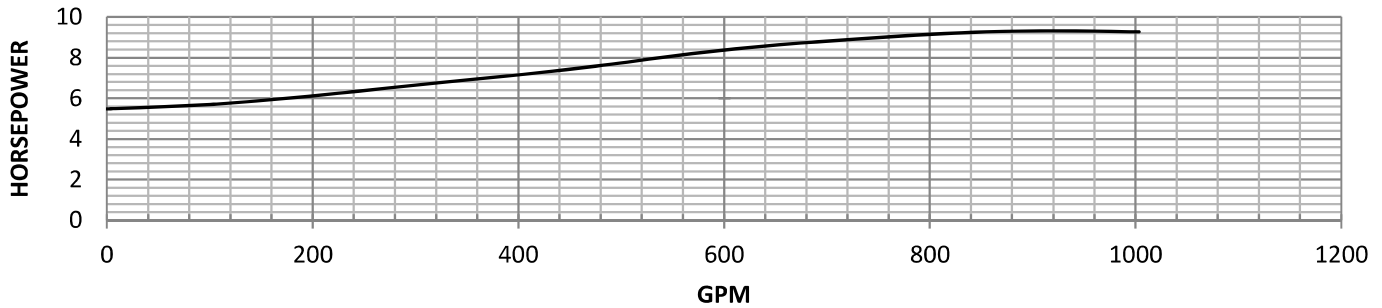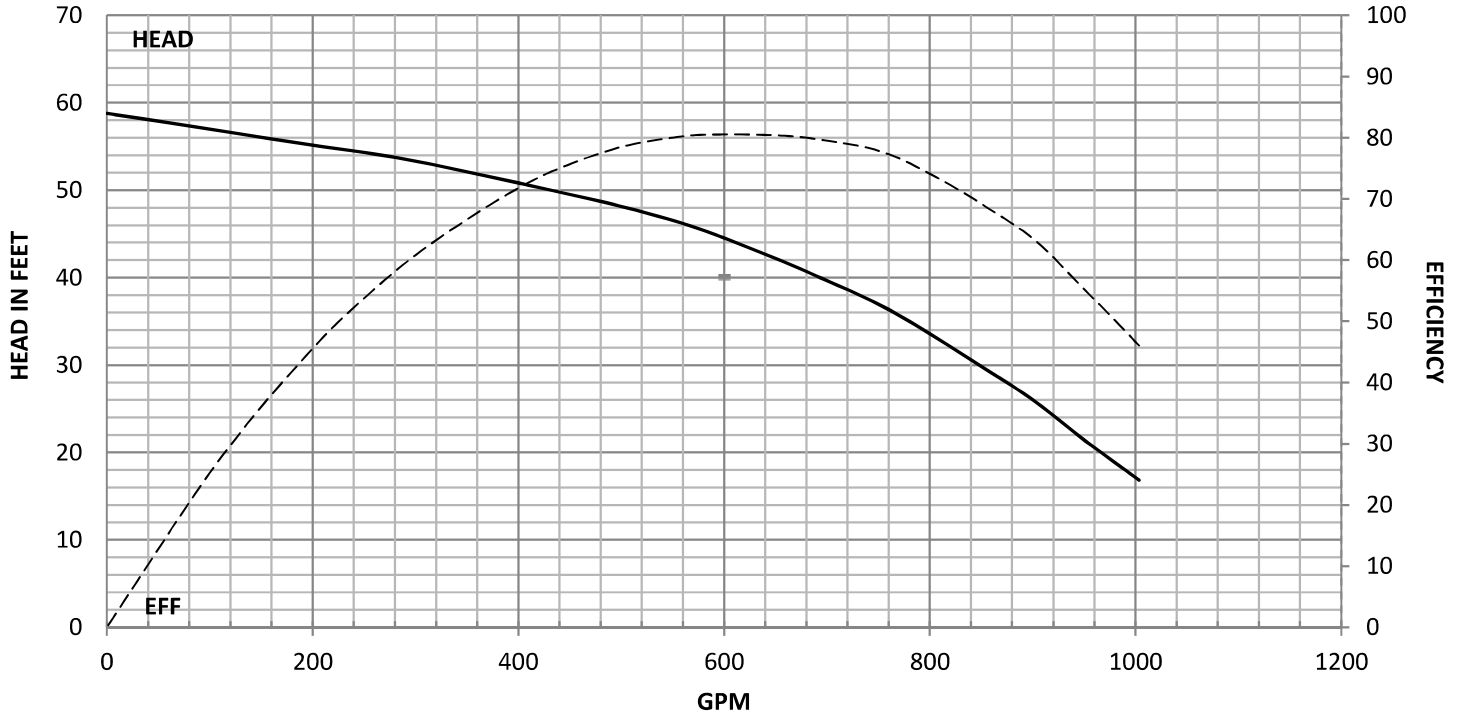



SUBMERSIBLES AND ELECTRIC




Model:	R9LO	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	1612143960	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	DEC/16/14	Bowl Lateral:	1.100"	2 Stage	-1	
Imp. Type:	Open	Bowl O.D.:	9.250"	3 Stage	-0.5	
Imp. Diam.:	6.880"	K-Factor:	7.00 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2334	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	400			

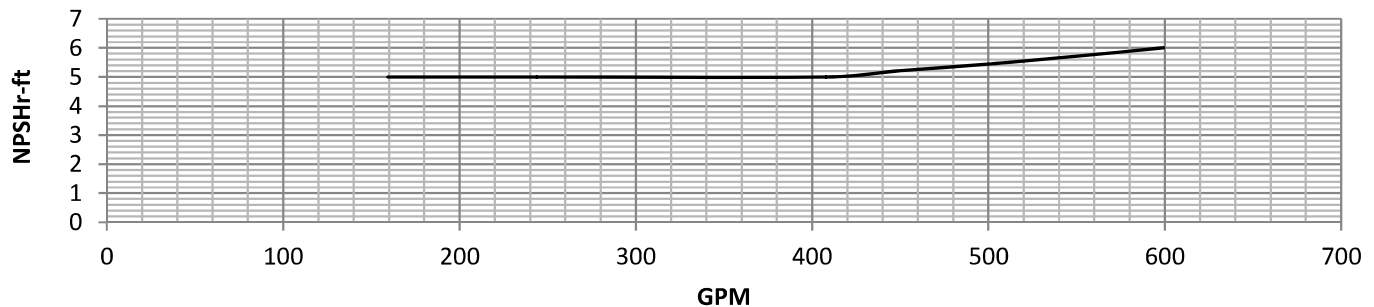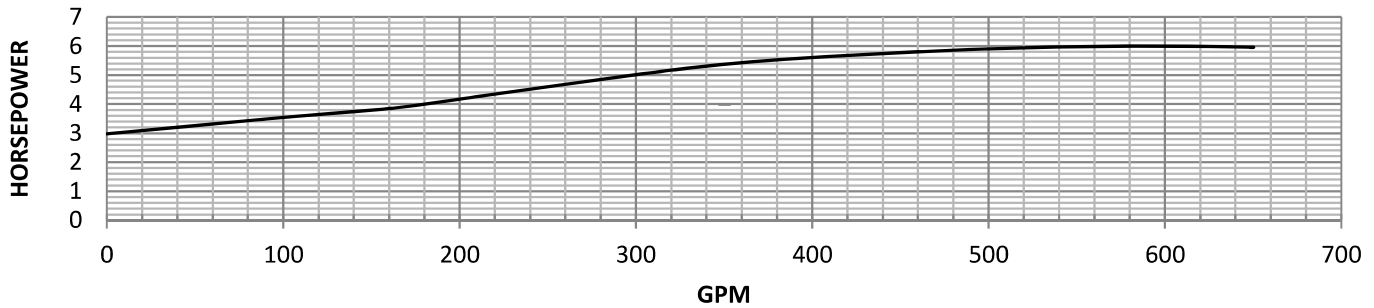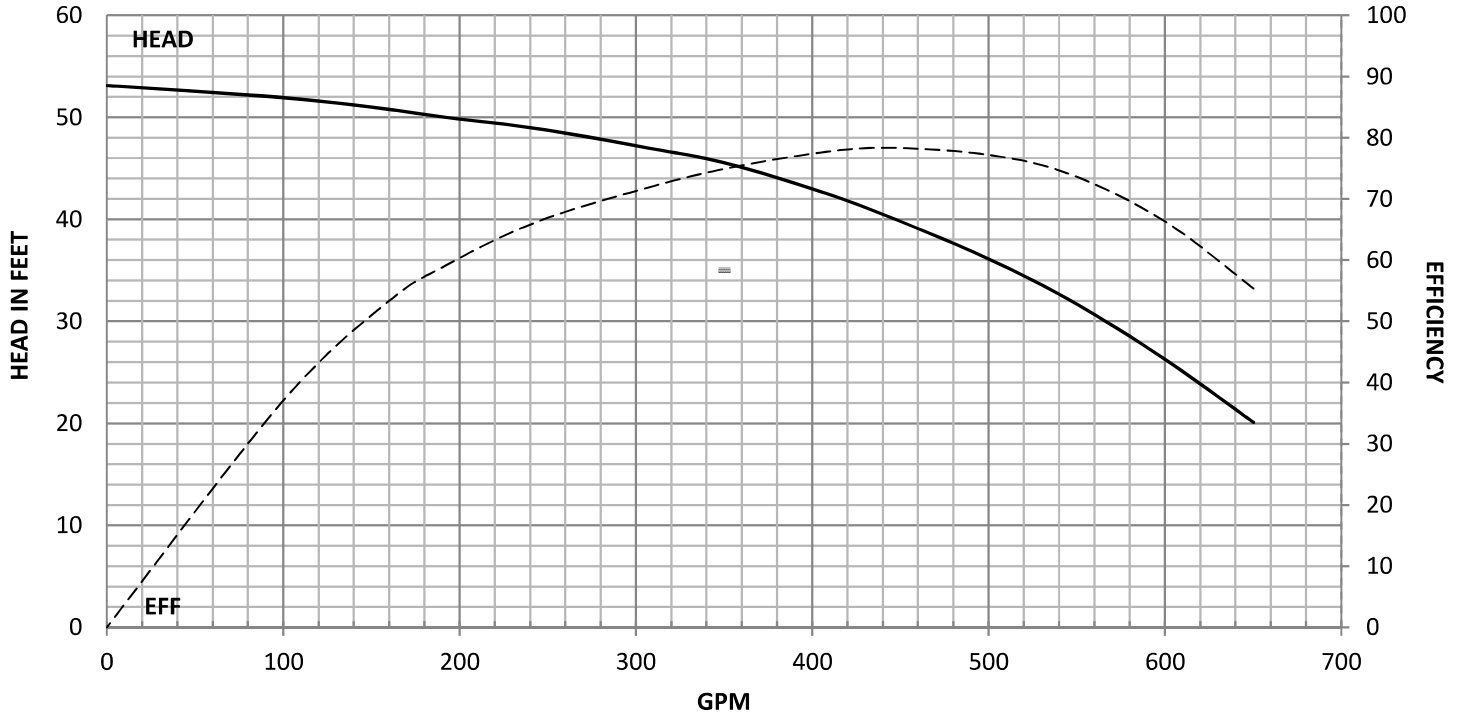



SUBMERSIBLES AND ELECTRIC




Model:	R9LC	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	0501153983	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	JAN/05/15	Bowl Lateral:	1.250"	2 Stage	-1	
Imp. Type:	Closed	Bowl O.D.:	9.250"	3 Stage	-0.5	
Imp. Diam.:	6.880"	K-Factor:	4.90 Lbs/Ft	4 Stage	0.0	
RPM:	1770	Ns:	2290			
Stage Qty.:	1	Max P.S.I.:	400			

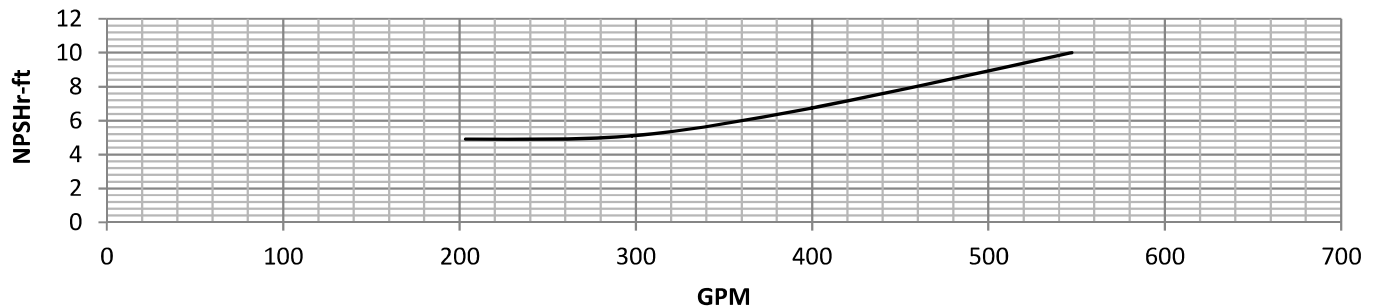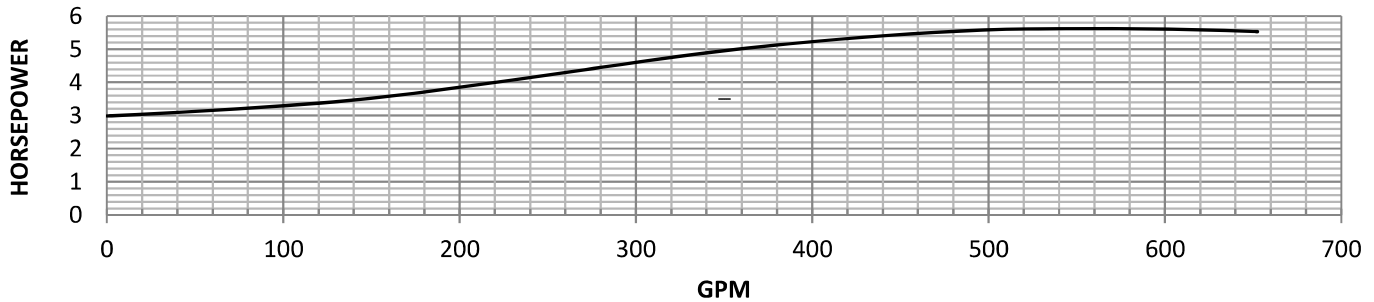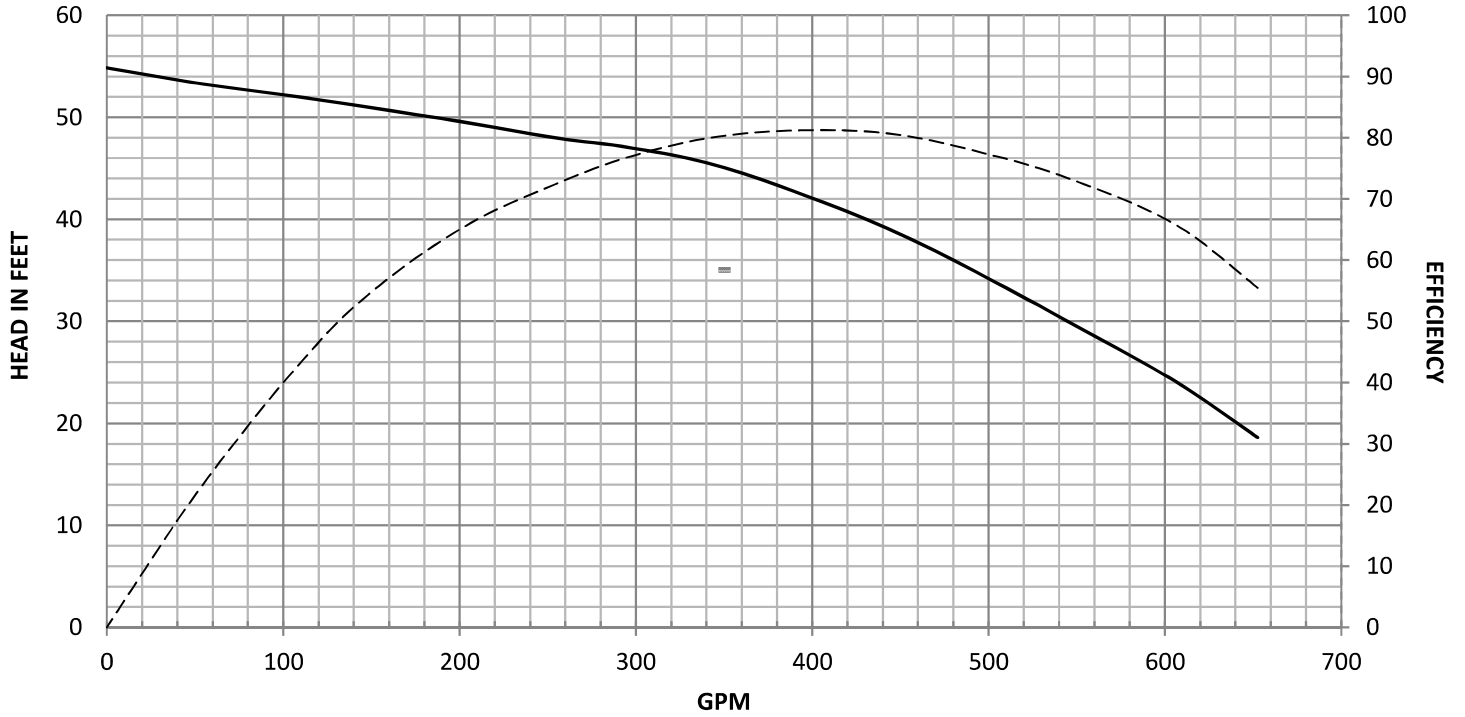



SUBMERSIBLES AND ELECTRIC

Model:	R9HO	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	3112143979	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	DEC/31/14	Bowl Lateral:	1.100"	2 Stage	-1	
Imp. Type:	Open	Bowl O.D.:	9.250"	3 Stage	-0.5	
Imp. Diam.:	6.880"	K-Factor:	6.00 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2275	Test lift:	0.005"	
Stage Qty.:	1	Max P.S.I.:	400			

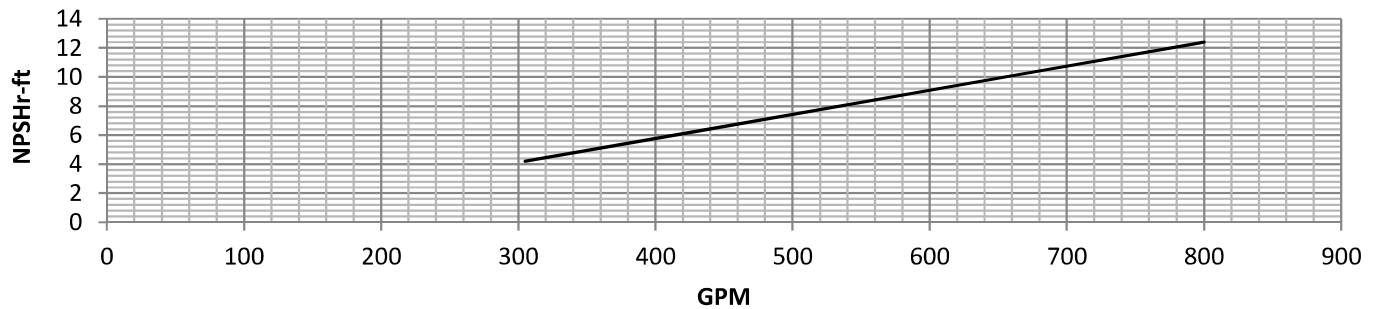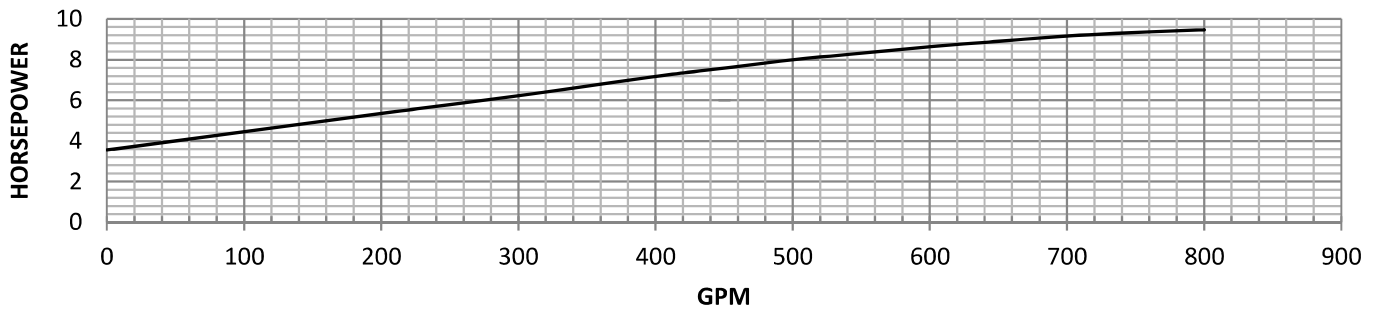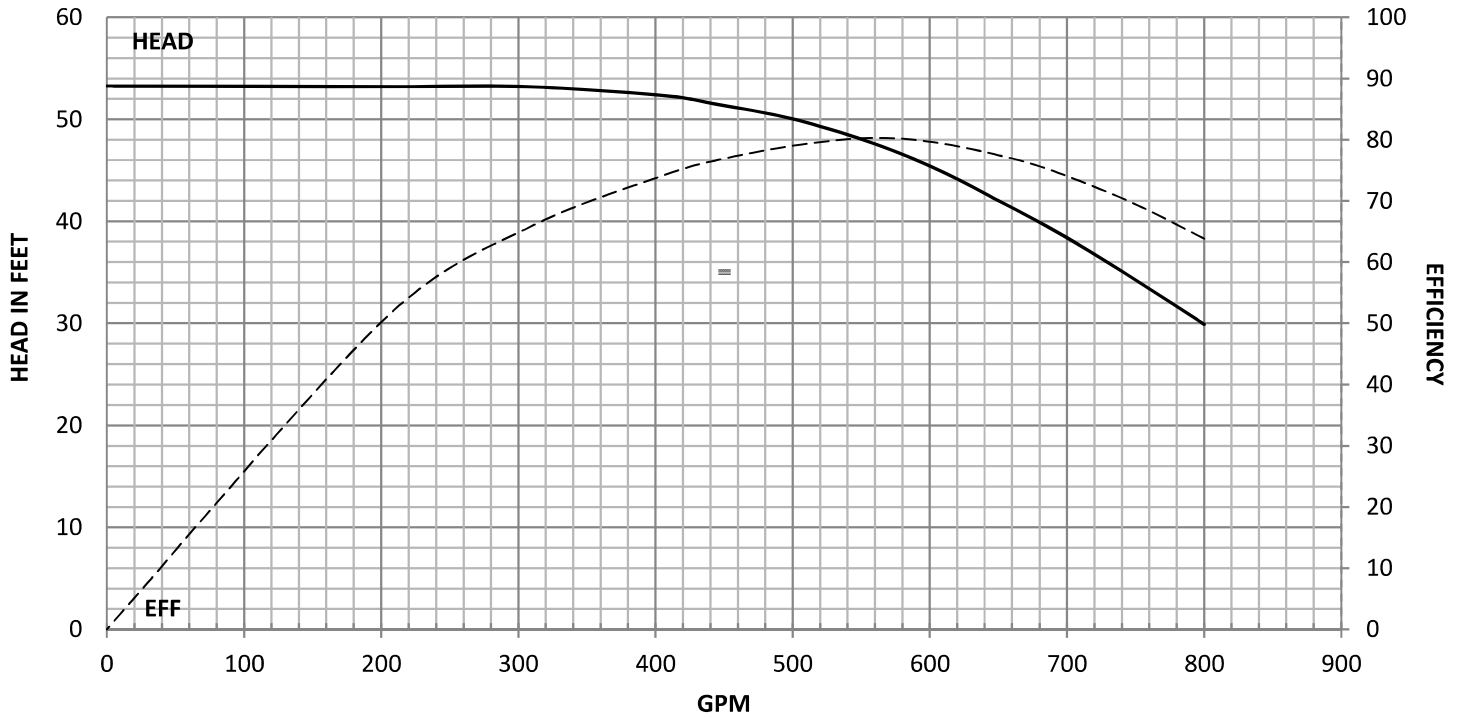



SUBMERSIBLES AND ELECTRIC

Model:	R9HC	Disch sizes:	6" & 8"	Efficiency Correction		Bowl Performance curve based on pumping clear, non-aerated water. Rated point only is guaranteed. Curves represent single stage performance based on test of multi-stage bowl assembly. Efficiency correction is required for lesser stages
Curve No.:	3012143973	Shaft Dia:	1.500"	1 Stage	-2	
Rev.:	DEC/30/14	Bowl Lateral:	1.250"	2 Stage	-1	
Imp. Type:	Closed	Bowl O.D.:	9.250"	3 Stage	-0.5	
Imp. Diam.:	6.880"	K-Factor:	7.00 Lbs/Ft	4 Stage	0	
RPM:	1770	Ns:	2300			
Stage Qty.:	1	Max P.S.I.:	400			

